

## DS7838

### *Quad Unified Bus Transceiver*

The DS7838/DS8838 are quad high speed drivers/receivers designed for use in bus organized data transmission systems interconnected by terminated 120Ω impedance lines. The external termination is intended to be 180Ω resistor from the bus to the +5V logic supply together with a 390Ω resistor from the bus to ground. The bus can be terminated at one or both ends. Low bus pin current allows up to 27 driver/receiver pairs to utilize a common bus. The bus loading is unchanged when  $V_{CC} = 0V$ . The receivers incorporate hysteresis to greatly enhance bus noise immunity. One two-input NOR gate is included to disable all drivers in a package simultaneously. Receiver performance is optimized for systems with bus rise and fall times  $\leq 1.0 \mu s/V$ .

#### **Rochester Electronics Manufactured Components**

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

#### **Quality Overview**

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-38535
  - Class Q Military
  - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
  - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

*The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.*



## DS7838/DS8838 Quad Unified Bus Transceiver


### General Description

The DS7838/DS8838 are quad high speed drivers/receivers designed for use in bus organized data transmission systems interconnected by terminated 120Ω impedance lines. The external termination is intended to be 180Ω resistor from the bus to the +5V logic supply together with a 390Ω resistor from the bus to ground. The bus can be terminated at one or both ends. Low bus pin current allows up to 27 driver/receiver pairs to utilize a common bus. The bus loading is unchanged when  $V_{CC} = 0V$ . The receivers incorporate hysteresis to greatly enhance bus noise immunity. One two-input NOR gate is included to disable all drivers in a package simultaneously. Receiver performance is optimized for systems with bus rise and fall times  $\leq 1.0 \mu s/V$ .

### Features


- 4 totally separate driver/receiver pairs per package
- 1V typical receiver input hysteresis
- Receiver hysteresis independent of receiver output load
- Guaranteed minimum bus noise immunity of 1.3V, 2V typ.
- Temperature-insensitive receiver thresholds track bus logic levels
- 20  $\mu A$  typical bus terminal current with normal  $V_{CC}$  or with  $V_{CC} = 0V$
- Open collector driver output allows wire-OR connection
- High speed
- Series 74 TTL compatible driver and disable inputs and receiver outputs

### Typical Application

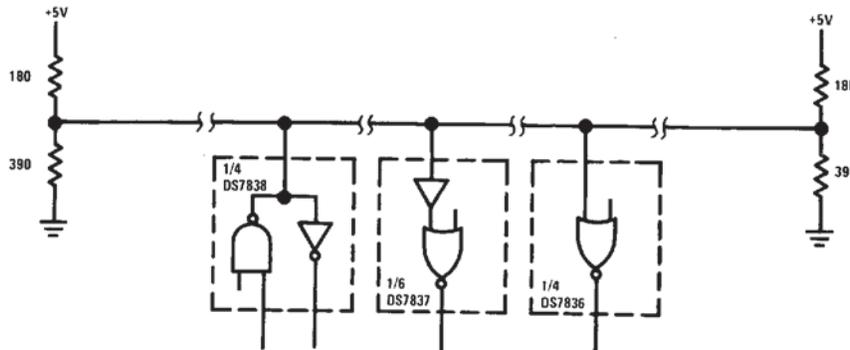

TL/F/5812-1

### Connection Diagram

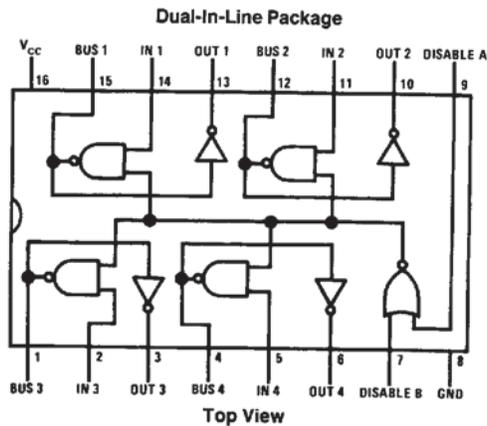

TL/F/5812-2

Order Number DS7838J, DS8838M or DS8838N  
See NS Package Number J16A, M16A or N16A

**Absolute Maximum Ratings** (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage	7V
Input and Output Voltage	5.5V
Storage Temperature Range	-65°C to +150°C
Lead Temperature, (Soldering, 4 sec.)	260°C

\*Derate cavity package 9.6 mW/°C above 25°C; derate molded DIP package 10.9 mW/°C above 25°C; derate SO package 8.01 mW/°C above 25°C.

Maximum Power Dissipation\* at 25°C

Cavity Package	1433 mW
Molded DIP Package	1362 mW
SO Package	1002 mW

**Operating Conditions**

Operating Temperature Range	-55°C to +125°C
DS7838	-55°C to +125°C
DS8838	0°C to +70°C

Supply Voltage ( $V_{CC}$ )

DS7838	$4.5V \leq V_{CC} \leq 5.5V$
DS8838	$4.75V \leq V_{CC} \leq 5.25V$

**Electrical Characteristics**

DS7838/DS8838: The following apply for  $V_{MIN} \leq V_{CC} \leq V_{MAX}$ ,  $T_{MIN} \leq T_A \leq T_{MAX}$ , unless otherwise specified (Notes 2 and 3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
<b>DRIVER AND DISABLE INPUTS</b>							
$V_{IH}$	Logical "1" Input Voltage		2.0			V	
$V_{IL}$	Logical "0" Input Voltage				0.8	V	
$I_I$	Logical "1" Input Current	$V_{IN} = 5.5V$			1	mA	
$I_{IH}$	Logical "1" Input Current	$V_{IN} = 2.4V$			40	$\mu A$	
$I_{IL}$	Logical "0" Input Current	$V_{IN} = 0.4V$			-1.6	mA	
$V_{CL}$	Input Diode Clamp Voltage	$I_{DIS} = -12 mA$ , $I_{IN} = -12 mA$ , $I_{BUS} = -12 mA$ , $T_A = 25^\circ C$		-1	-1.5	V	
<b>DRIVER OUTPUT/RECEIVER INPUT</b>							
$V_{OLB}$	Low Level Bus Voltage	$V_{DIS} = 0.8V$ , $V_{IN} = 2V$ , $I_{BUS} = 50 mA$		0.4	0.7	V	
$I_{IHB}$	Maximum Bus Current	$V_{IN} = 0.8V$ , $V_{BUS} = 4V$ , $V_{CC} = V_{MAX}$		20	100	$\mu A$	
$I_{ILB}$	Maximum Bus Current	$V_{IN} = 0.8V$ , $V_{BUS} = 4V$ , $V_{CC} = 0V$		2	100	$\mu A$	
$V_{IH}$	High Level Receiver Threshold	$V_{IND} = 0.8V$ , $I_{OL} = 16 mA$ $V_{CC} = Max$	DS7838	1.65	2.25	2.65	V
			DS8838	1.80	2.25	2.50	V
$V_{IL}$	Low Level Receiver Threshold	$V_{IND} = 0.8V$ , $V_{OH} = -400 \mu A$ $V_{CC} = Min$	DS7838	0.97	1.30	1.63	V
			DS8838	1.05	1.30	1.55	V
<b>RECEIVER OUTPUT</b>							
$V_{OH}$	Logical "1" Output Voltage	$V_{IN} = 0.8V$ , $V_{BUS} = 0.5V$ , $I_{OH} = -400 \mu A$	2.4			V	
$V_{OL}$	Logical "0" Output Voltage	$V_{IN} = 0.8V$ , $V_{BUS} = 4V$ , $I_{OL} = 16 mA$		0.25	0.4	V	
$I_{OS}$	Output Short Circuit Current	$V_{DIS} = 0.8V$ , $V_{IN} = 0.8V$ , $V_{BUS} = 0.5V$ , $V_{OS} = 0V$ , $V_{CC} = V_{MAX}$ , (Note 4)	-18		-55	mA	
$I_{CC}$	Supply Current	$V_{DIS} = 0V$ , $V_{IN} = 2V$ , (Per Package)		50	70	mA	

**Electrical Characteristics**

DS7838/DS8838: The following apply for  $V_{MIN} \leq V_{CC} \leq V_{MAX}$ ,  $T_{MIN} \leq T_A \leq T_{MAX}$ , unless otherwise specified (Notes 2 and 3)  
(Continued)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>RECEIVER OUTPUT (Continued)</b>						
$t_{pd}$	Propagation Delays (Note 8) Disable to Bus "1"	(Note 5)		19	30	ns
	Disable to Bus "0"	(Note 5)		15	23	ns
	Driver Input to Bus "1"	(Note 5)		17	25	ns
	Driver Input to Bus "0"	(Note 5)		9	15	ns
	Bus to Logical "1" Receiver Output	(Note 6)		20	30	ns
	Bus to Logical "0" Receiver Output	(Note 7)		18	30	ns

**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

**Note 2:** Unless otherwise specified min/max limits apply across the  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  temperature range for the DS7838 and across the  $0^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$  range for the DS8838. All typical values are for  $T_A = 25^{\circ}\text{C}$  and  $V_{CC} = 5\text{V}$ .

**Note 3:** All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

**Note 4:** Only one output at a time should be shorted.

**Note 5:**  $91\Omega$  from bus pin to  $V_{CC}$  and  $200\Omega$  from bus pin to ground,  $C_{LOAD} = 15\text{ pF}$  total. Measured from  $V_{IN} = 1.5\text{V}$  to  $V_{BUS} = 1.5\text{V}$ ,  $V_{IN} = 0\text{V}$  to  $3.0\text{V}$  pulse.

**Note 6:** Fan-out of 10 load,  $C_{LOAD} = 15\text{ pF}$  total. Measured from  $V_{IN} = 1.3\text{V}$  to  $V_{OUT} = 1.5\text{V}$ ,  $V_{IN} = 0\text{V}$  to  $3.0\text{V}$  pulse.

**Note 7:** Fan-out of 10 load,  $C_{LOAD} = 15\text{ pF}$  total. Measured from  $V_{IN} = 2.3\text{V}$  to  $V_{OUT} = 1.5\text{V}$ ,  $V_{IN} = 0\text{V}$  to  $3.0\text{V}$  pulse.

**Note 8:** These apply for  $V_{CC} = 5\text{V}$ ,  $T_A = 25^{\circ}\text{C}$  unless otherwise specified.