


No.28AWG 7x0.127 Thinned Stranded Copper Conductor

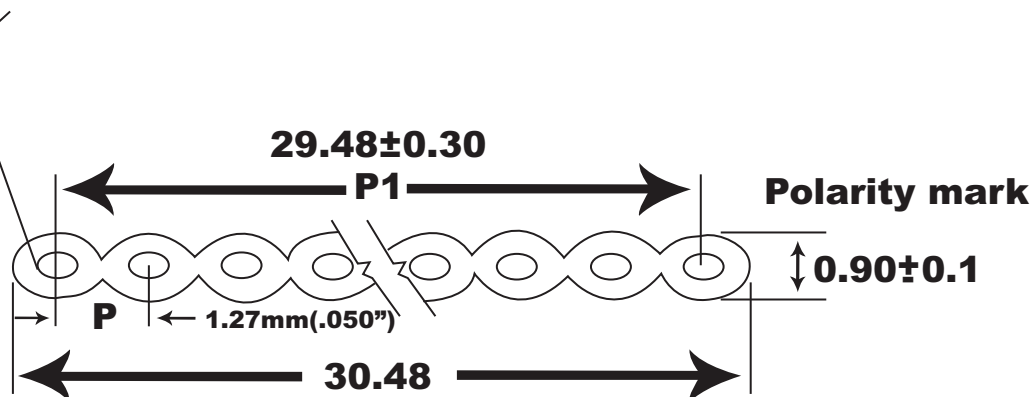

Electrical & Physical Characteristics:

- Voltage Rating: 300V
- Temperature Rating: 105°C
- Dielectric Strength: 2. OKV 60Hz 1 Minute
- Conductor Resistance: 237/KM Max.
- Insulation Resistance: 100M /M Min. @500V DC
- Tensile Strength Before Aging: 1,500PSI
- Tensile Strength After Aging: 70% Min. (136°C*168H)
- Elongation Before Aging: 100% Min.
- Elongation After Aging: 65% Min. (136°C*168H)
- Deformation Test 50% Max. (121°C*1H)
- Cold Bend Test: -10°C*4H No Cracking
- Horizontal Flame Test: VW-1
- UL File No. E189529
- UL Style: 2651-VW-1

Unit: MM



Scale	1:1							Name
TOLERANCE						Drawn	11.01.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
								
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AWG28-24/G/300

Title	Flat Ribbon Cable - 24 Conductors, 1.27MM Pitch, 300 Feet-13" Reel, Grey
--------------	---

Drawing No.	
-------------	--

rev00

Replace	Sheet
---------	-------