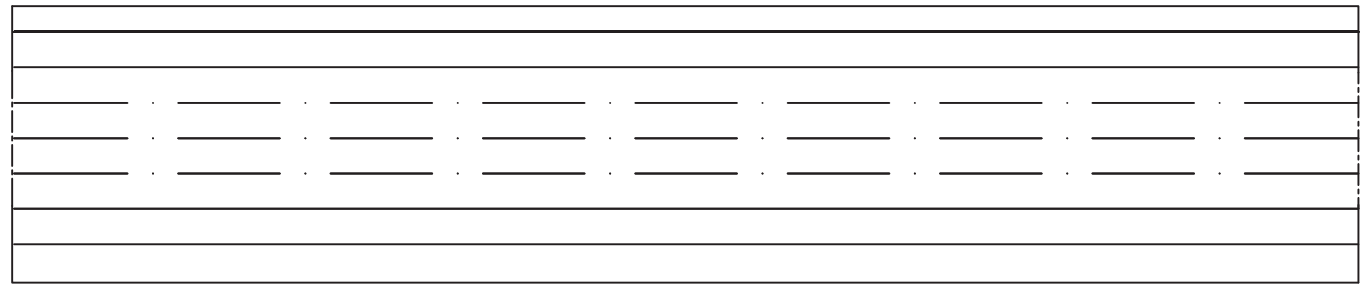

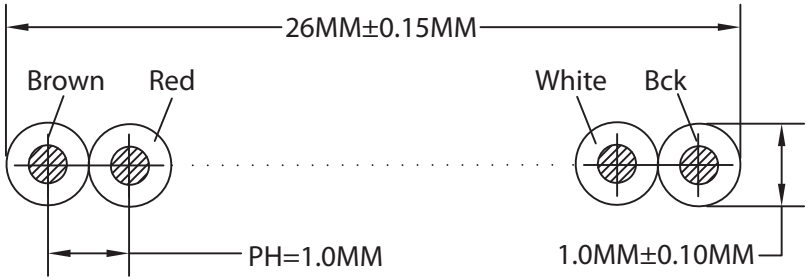


**Conductor:**
- Style/Size: UL2651 28AWG NPIN
- Material: TC
- Construction: 7/Φ0.125±0.008MM

**Jacket:**
- Min. Avg. Thick: 0.26MM
- Min. Thick.: 0.18MM
- Material: 35Pa UL-PVC (All the raw material meet VEGA GP standards)
- Color: NP(Brown, Red, Pink, Yellow, Green, Blue, Purple, Grey, White, Black...
  ... Brown Red, Pink, Yellow, Green, Blue, Purple, Grey, White, Black)
- OD: 1.0MM±0.10MM*50.0MM±0.15MM

**Electrical:**
- Conductor Resistance: Max. 237.25Ω/Km, 20°C
- Insulation Resistance: Min. 20MΩ/Km, 20°C
- Dielectric Strength: 1,500V AC 1min.
- UL File No. E189529
- UL Style: 2651-VW-1

Unit: MM±0.15MM

RoHS Complaint

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Scale | 1:1 | | | | | | Name |
| TOLERANCE | | | | | | | |
| X.X | ±0.40 | | | Drawn | 10.31.11 | Chappell | |
| X.XX | ±0.25 | | | Approved | | | |
| X.XXX | ±0.15 | | | | | | |
| Angle | ±3° | | | | | | |
| | | | Modification | Date | Name | | |

ASSMANN WSW components

**Item No.** **AWG28-26/F-1/300-R**

**Title** Multi-Color Ribbon Cable - 28AWG, 1.0MM Pitch, 26 Conductors, 300 Feet, 13" Reel

Drawing No. **rev00**

Replace | Sheet