

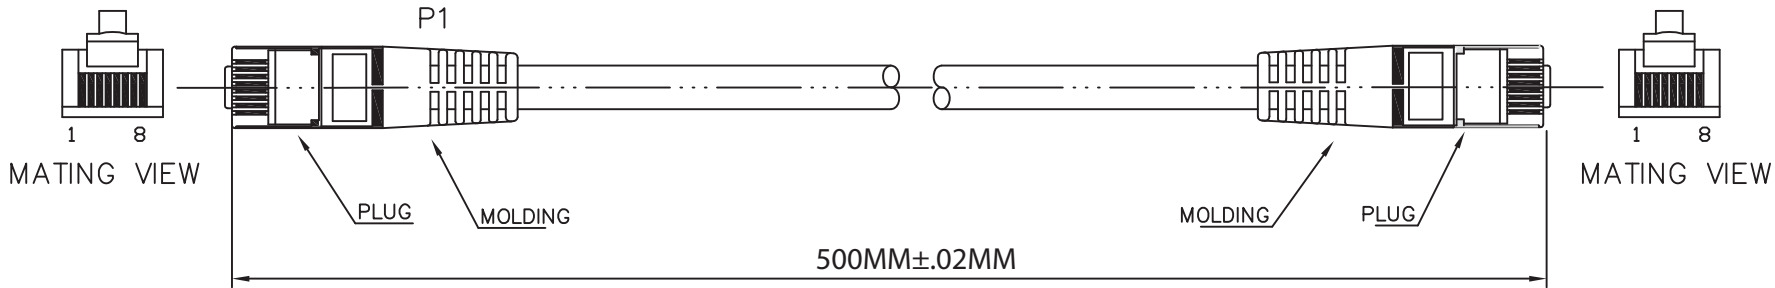


A



B

C

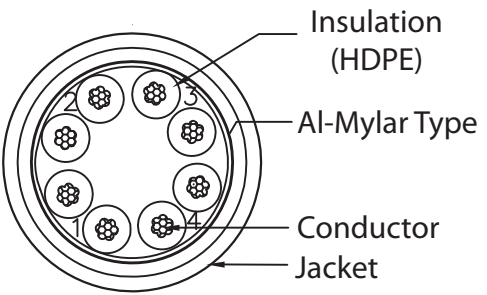

Material:

- Conductor:
 - Bare Copper
 - FTP STR 26AWG*4P
- Insulator:
 - Thickness Min. at any point: 0.15MM
 - Thickness Max. Avg.: 0.25MM
 - Diameter: 0.85±0.06MM
- Jacket PVC:
 - Thickness Min. at any point: 0.50MM
 - Thickness Max. Avg.: 0.60MM
 - Diameter: 5.6±0.02MM

D

E

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

G

Scale	1:1					Name	Item No.
TOLERANCE					Drawn	10.28.11	A-MCSP-80005-R
X.X	±0.40				Approved	10.28.11	
X.XX	±0.25						Drawing No.
X.XXX	±0.15						rev00
Angle	±3°						
							Sheet
		Modification	Date	Name			



H