


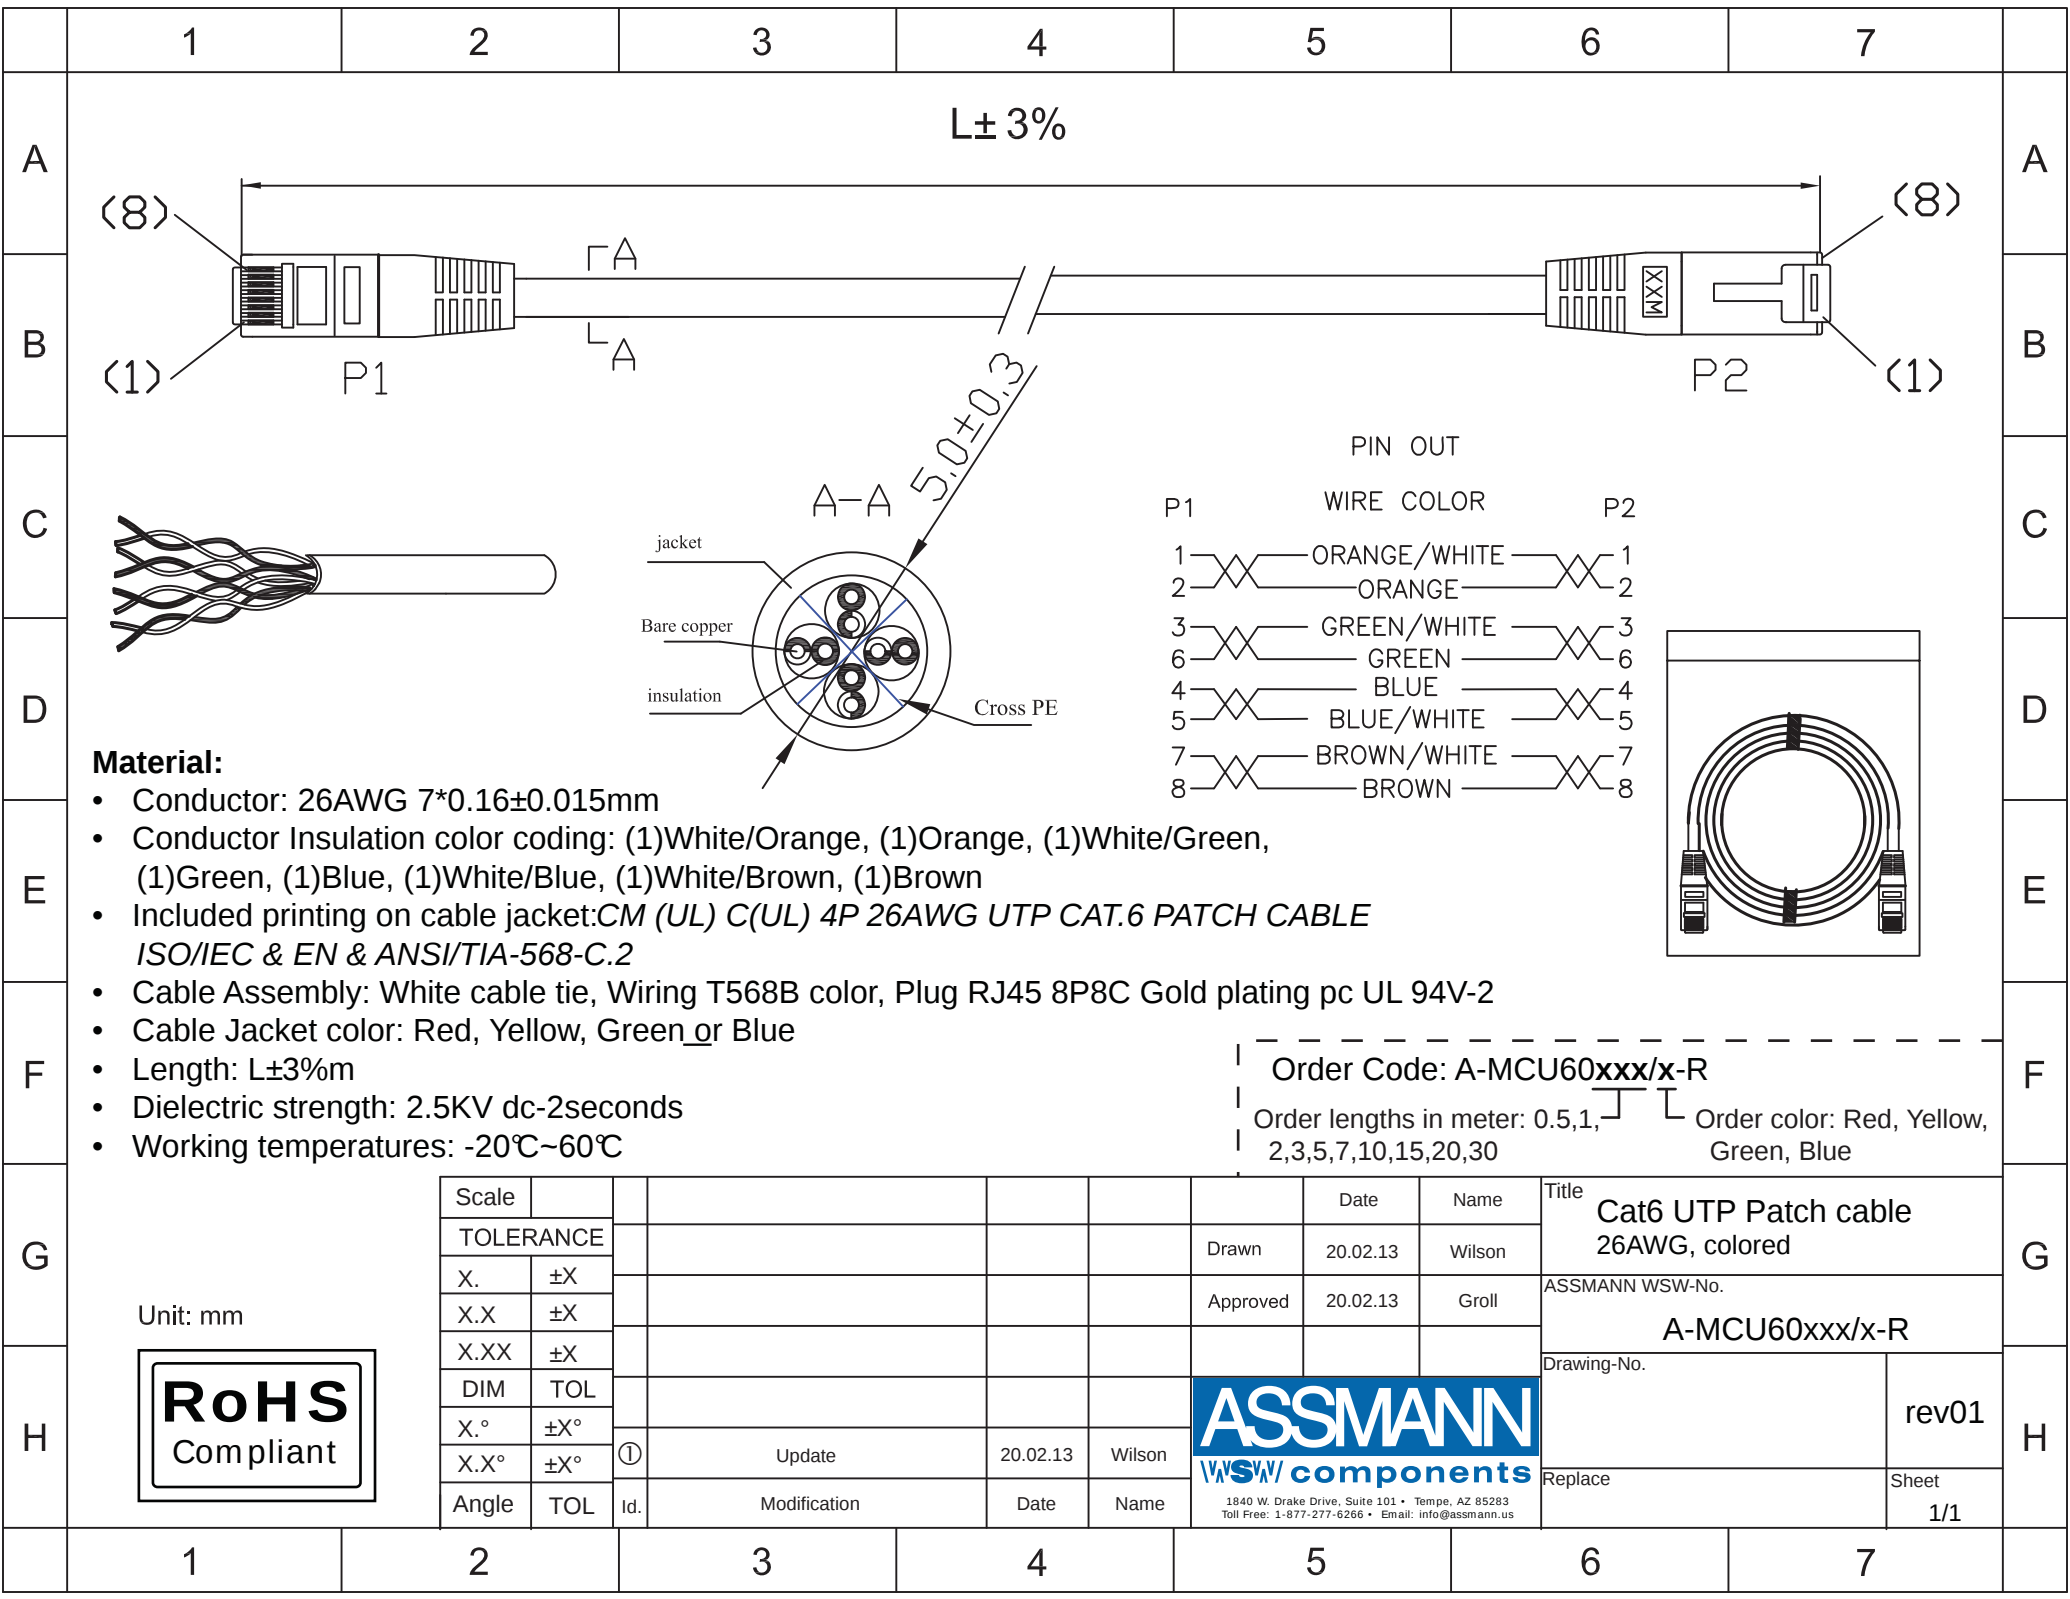

Material:

- Conductor: 26AWG 7*0.16±0.015mm
- Conductor Insulation color coding: (1)White/Orange, (1)Orange, (1)White/Green, (1)Green, (1)Blue, (1)White/Blue, (1)White/Brown, (1)Brown
- Included printing on cable jacket:CM (UL) C(UL) 4P 26AWG UTP CAT.6 PATCH CABLE ISO/IEC & EN & ANSI/TIA-568-C.2
- Cable Assembly: White cable tie, Wiring T568B color, Plug RJ45 8P8C Gold plating pc UL 94V-2
- Cable Jacket color: Red, Yellow, Green_or Blue
- Length: L±3%
m
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20℃~60℃

Order Code: A-MCU60xxx/x-R

Order lengths in meter: 0.5,1,2,3,5,7,10,15,20,30

Order color: Red, Yellow, Green, Blue

Unit: mm



Scale						Date	Name	Title Cat6 UTP Patch cable 26AWG, colored
TOLERANCE					Drawn	20.02.13	Wilson	
X.	±X				Approved	20.02.13	Groll	ASSMANN WSW-No.
X.X	±X							A-MCU60xxx/x-R
X.XX	±X							Drawing-No.
DIM	TOL							
X.°	±X°							rev01
X.X°	±X°	①	Update	20.02.13	Wilson			
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		

Replace	Sheet 1/1
---------	--------------