



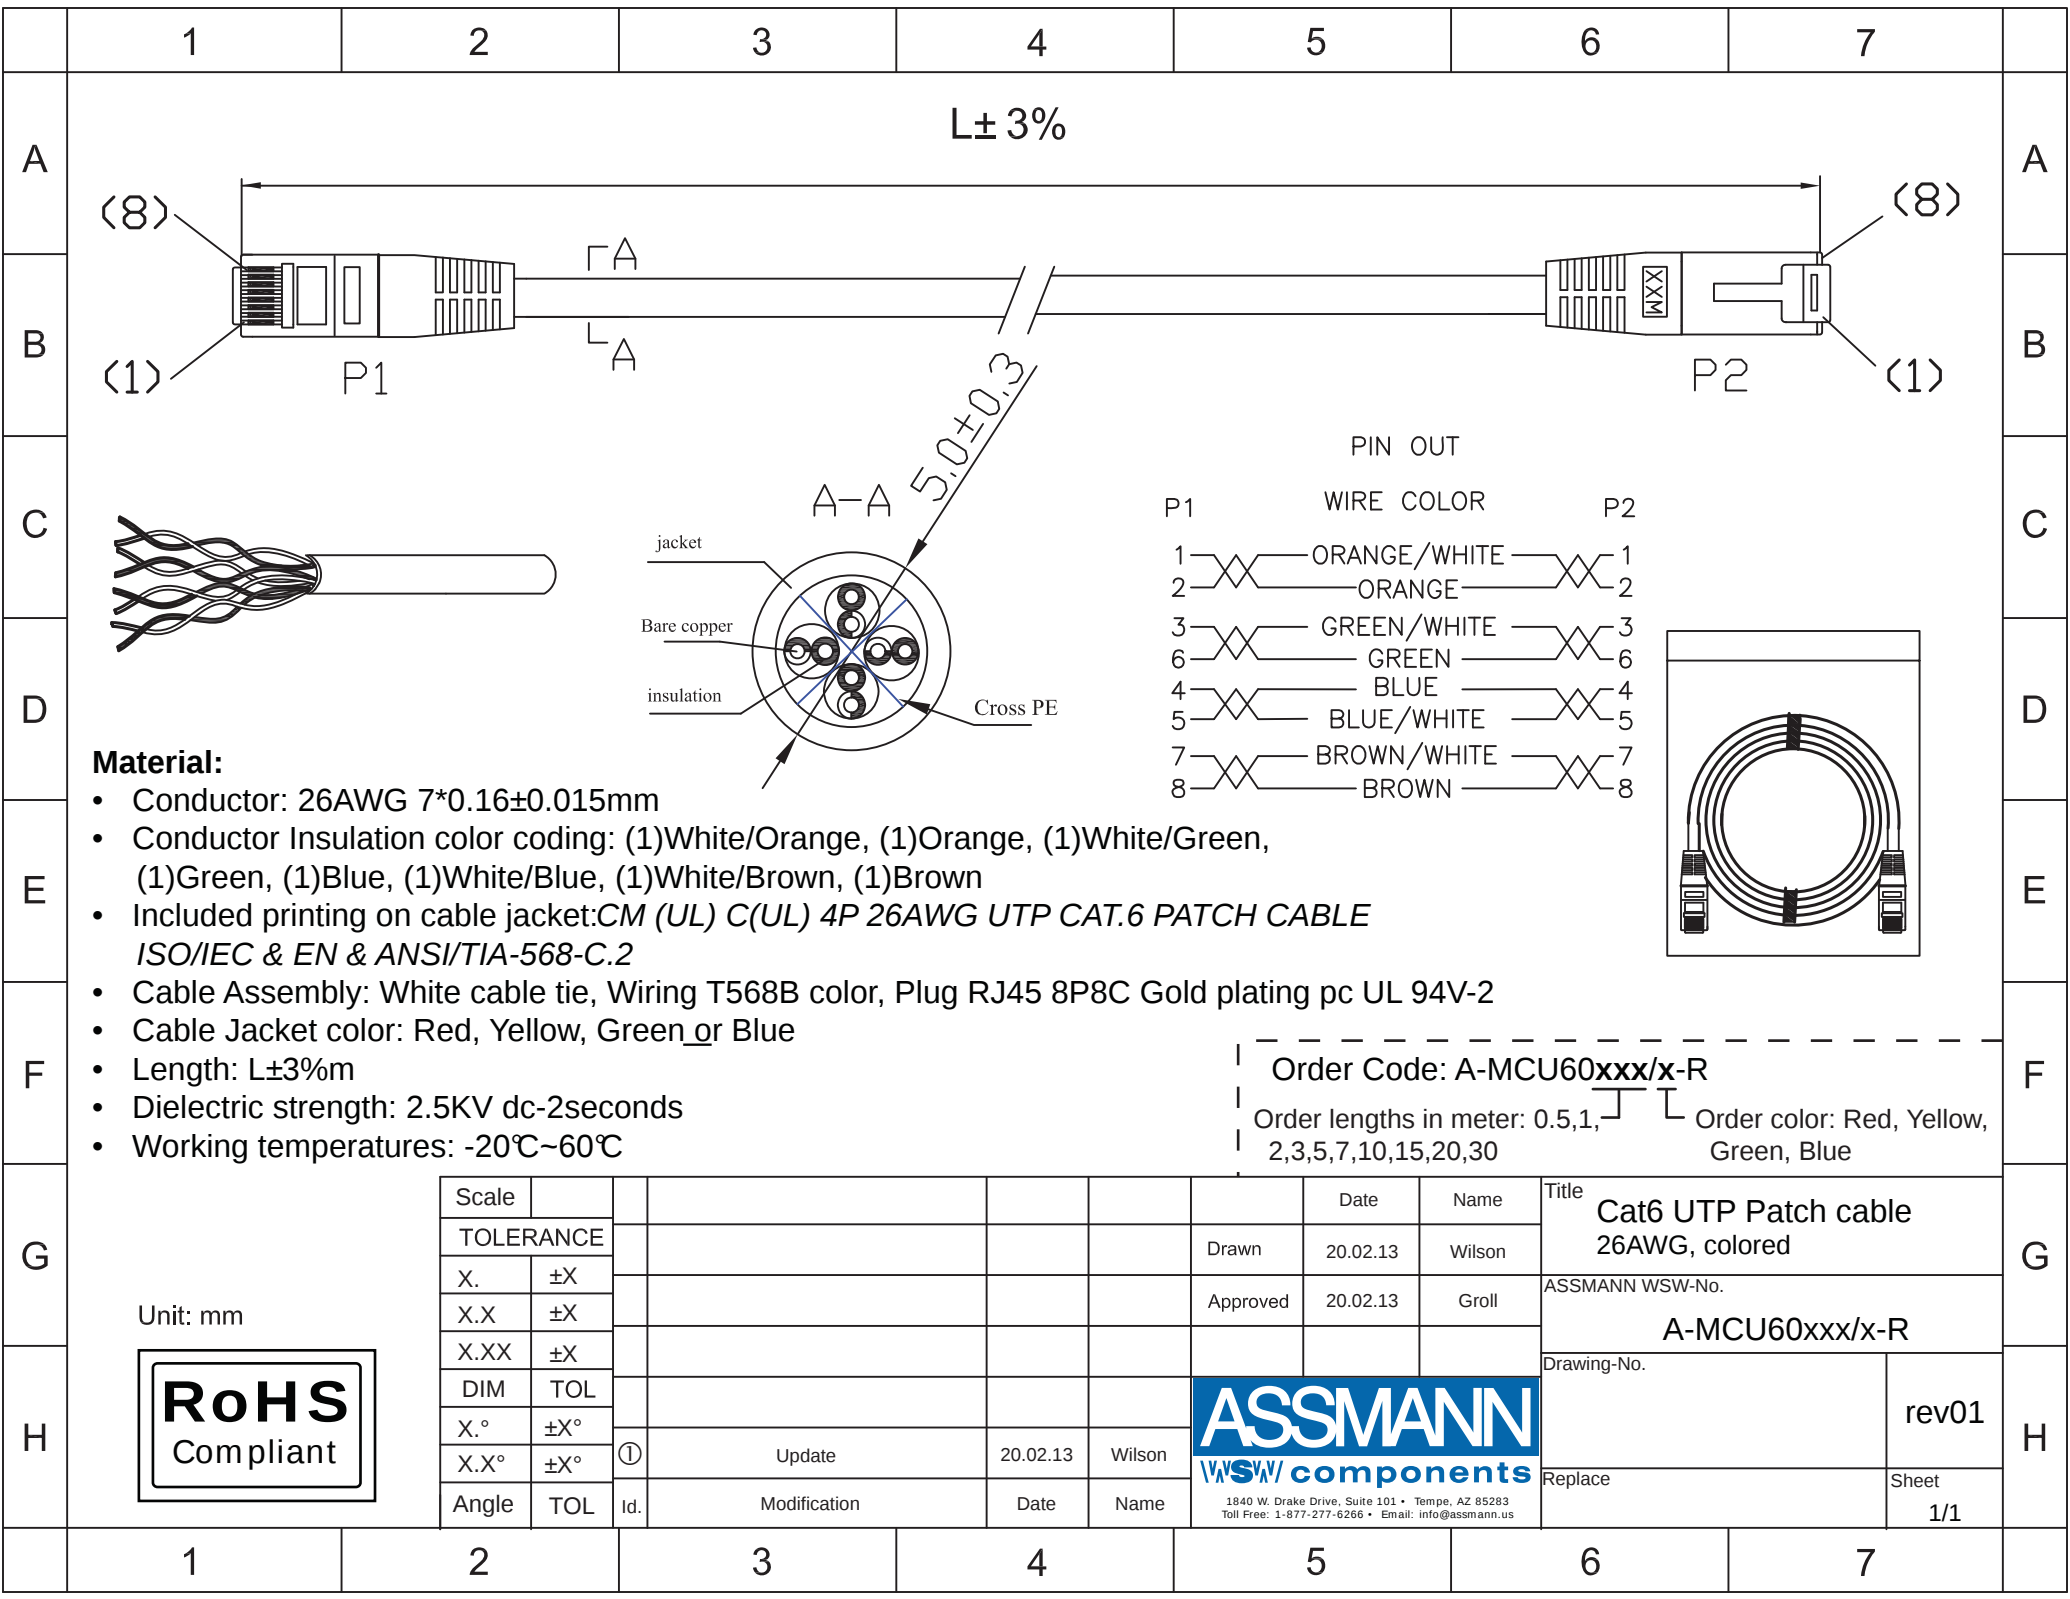

Material:

- Conductor: 26AWG 7*0.16±0.015mm
- Conductor Insulation color coding: (1)White/Orange, (1)Orange, (1)White/Green, (1)Green, (1)Blue, (1)White/Blue, (1)White/Brown, (1)Brown
- Included printing on cable jacket: *CM (UL) C(UL) 4P 26AWG UTP CAT.6 PATCH CABLE ISO/IEC & EN & ANSI/TIA-568-C.2*
- Cable Assembly: White cable tie, Wiring T568B color, Plug RJ45 8P8C Gold plating pc UL 94V-2
- Cable Jacket color: Red, Yellow, Green_or Blue
- Length: L±3%
m
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20℃~60℃

PIN OUT		
P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8



Order Code: A-MCU60xxx/x-R

Order lengths in meter: 0.5,1,2,3,5,7,10,15,20,30

Order color: Red, Yellow, Green, Blue

Unit: mm



Scale						Date	Name	Title	
TOLERANCE						Drawn	20.02.13	Wilson	Cat6 UTP Patch cable 26AWG, colored
X.	±X					Approved	20.02.13	Groll	ASSMANN WSW-No.
X.X	±X								A-MCU60xxx/x-R
X.XX	±X								Drawing-No.
DIM	TOL					ASSMANN WSW components			
X.°	±X°								rev01
X.X°	±X°	①	Update	20.02.13	Wilson				
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us			Sheet 1/1