
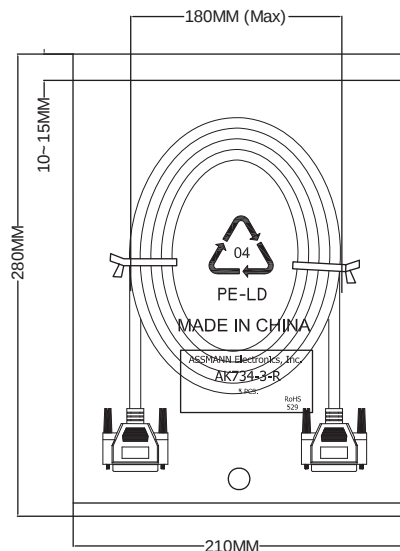


P1

P2

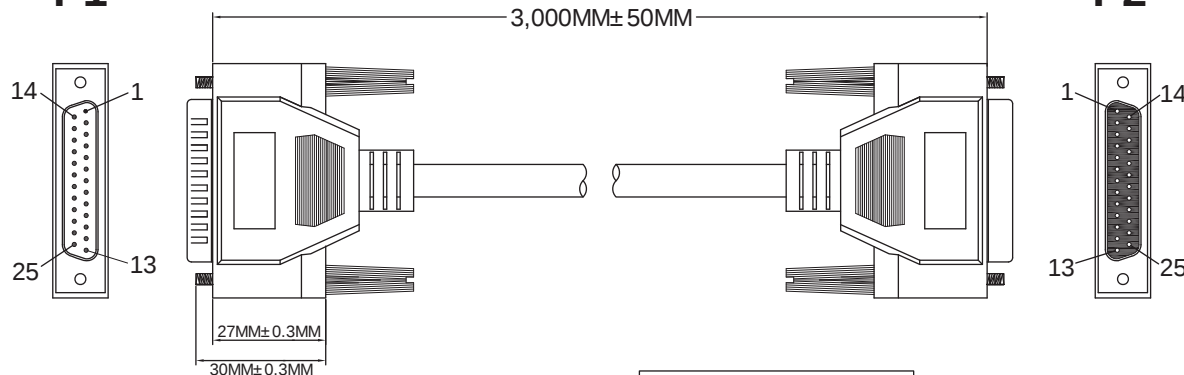

P1 Pin Assignment **P2**

1 18 1 18
2 19 2 19
3 19 3 19
4 20 4 20
5 20 5 20
6 21 6 21
7 21 7 21
8 22 8 22
9 22 9 22
10 24 10 24
11 23 11 23
12 24 12 24
13 24 13 24
14 25 14 25
15 25 15 25
16 23 16 23
17 23 17 23
18 25 18 25

SHELL DRAIN+BRAID SHELL

Material:

- Cable: UL20276, twisted pair cable, 28AWG(7/0.12TC)*
18P+ D(26AWGTC)+ AL/MY+ BRAID(85%)
 - OD Ø7.5MM
 - Outer Jacket Color: Beige(1V-29)
- P1 Connector: DB 25P Male Solder Type
 - Pin G/F
 - Insulation Color: Blue
 - Shell Plate Nickel
- P2 Connector: DB 25P Female Solder Type
 - Pin G/F
 - Insulation Color: Blue
 - Shell Plate Nickel
- Inner Jacket: Clear LD-PE
- Outer Jacket: Beige, 40P PVC
- Screw: #4-40UNC
 - Length: 30MM
 - Nickel Plated

Electrical:

- 100% Test, (Open, Short, Miss Wire)
- Contact Resistance: 5Ω Max.
- Insulation Resistance: 10MΩ Min.
- Hi-Pot: 300V DC/10ms

Unit: MM±0.25MM

Scale	1:1							Name
TOLERANCE						Drawn	11.11.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
		①	Added cable data	11.11.11	Wilson			
			Modification	Date	Name			

RoHS Complaint

Item No.	
----------	--

AK734-3-R

Title	IEEE 1284 Extension Cable - D-Sub 25 pin Male <=> D-Sub 25 pin Female, 3 Meters
-------	---

Drawing No.

rev00

Replace

Sheet
