




DB25 Male

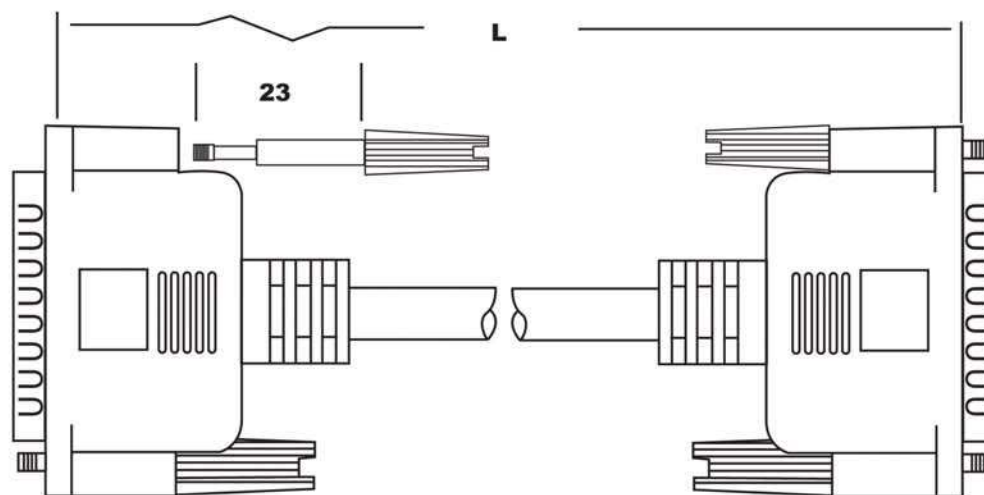

DB25 Male



Configuration:
DB25M

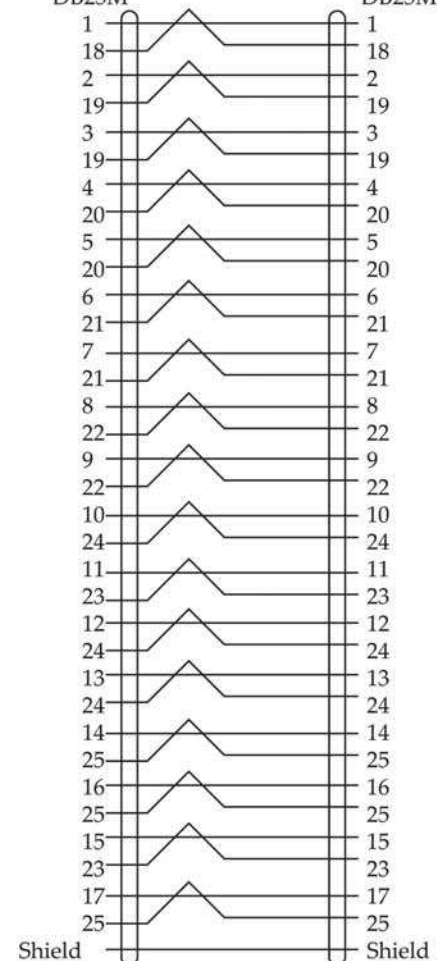

Material:

- 1.Cable: UL 20276 #28 18P+1(#26)+AL/MY+85%Braid O.D:7.5
- 2.Connector:DB25M, Blue
- 3.Thumbscrew: #4-40UNC, E23
- 4.Copper Tape: 30X95

Notes:

- 1.Total Length: SEE "ITEM NO."
- 2.Color: Beige
- 3.Molded Type
- 4.360°Solder

RoHS
Compliant

ITEM NO AK736-1.8-R (1.8 Meters)
AK737-3-R (3.0 Meters)
AK738-5-R (5.0 Meters)

TITLE IEEE 1284 Bi-Directional Connection Cable
D-SUB 25-Pin Male to D-SUB 25-Pin Male

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved