


DATE BY REVISION

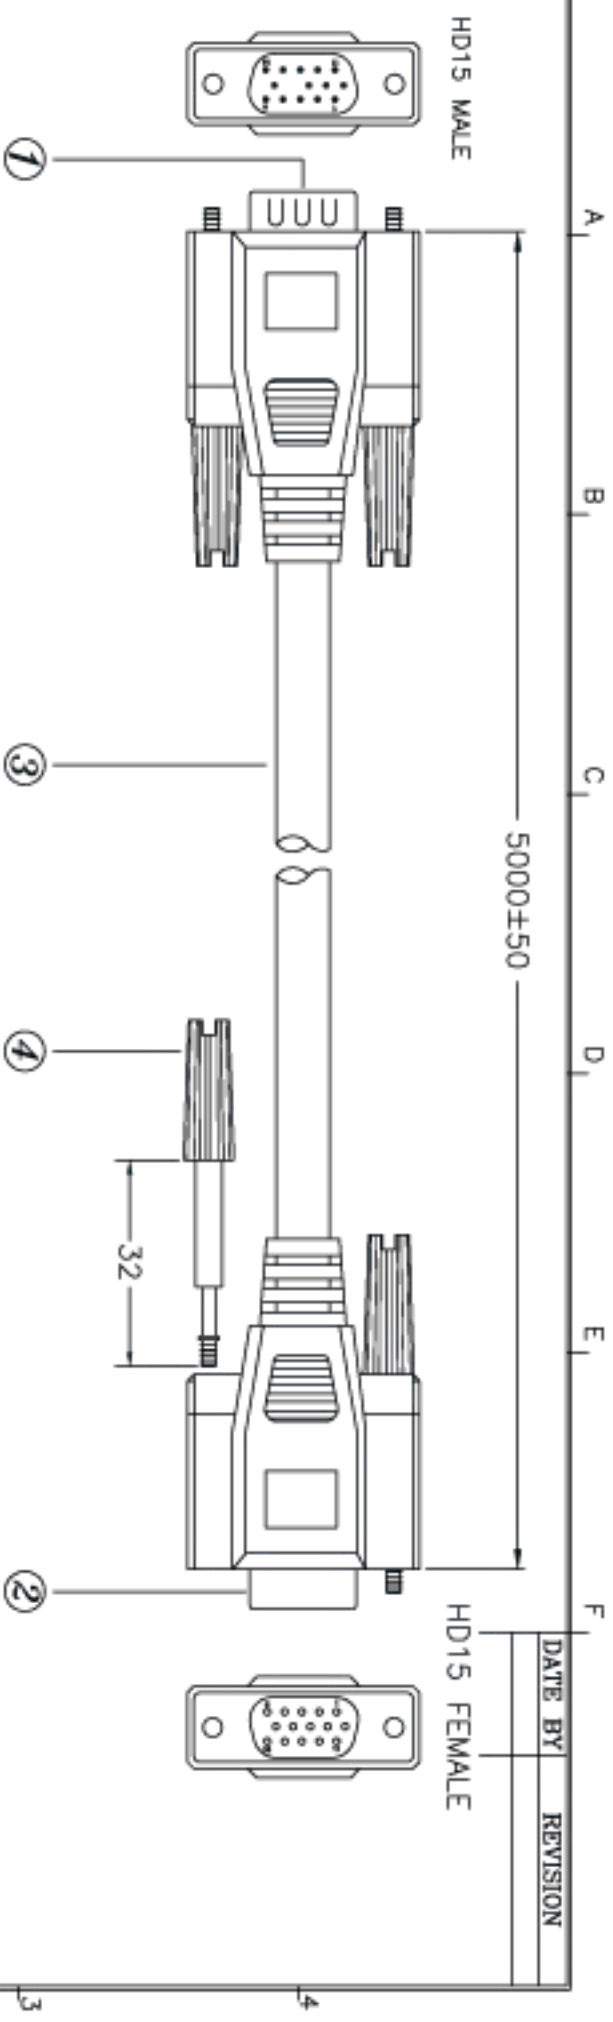

- MAT'L:
1. CABLE: UL2919, 3COAXIAL + 7C + 1 + AL / MY + BRAID, O.D: 8.5
 2. CONNECTORS: HD15M, 9th EMPTY, BLACK
HD15F, BLACK
 3. THUMBSCREW: #4-40UNC, E32
 4. BLACK HEAT SHRINK: ϕ 1.5 X 15:6PCS
 ϕ 3 X 8:6PCS
 5. COPPER SIZE: 30 X 50
- NOTE:
1. TOTAL LENGTH: 5000±50mm
 2. COLOR: BEIGE
 3. MOLDED TYPE
 4. 360° SOLDER
 5. ROHS COMPLIANT

CONFIGURATION:

HD15M		HD15F
1	RED (COAX.)	1
6	RED (GROUND)	6
2	GREEN (COAX.)	2
7	GREEN (GROUND)	7
3	BLUE (COAX.)	3
8	BLUE (GROUND)	8
4	BROWN	4
5	BLACK	5
13	GREEN	13
14	RED	14
10	ORANGE	10
11	WHITE	11
12	YELLOW	12
	(BRAID)	
	SHIELD	SHIELD

ROHS
Compliant

DATE	18 JUN, 1998	PARTS NO	MN3073N	TITLE:	HD15 MALE-HD15 FEMALE (MOLDED TYPE)
UNIT	MM	DRAWN NO	001131		
SCALE		BUYER NO	002		

	AK3740X 5M	ASSMANN ELECTRONICS, INC.
--	------------	---------------------------

NO.	DESCRIPTION	QTY
④	THUMBSCREW: #4-40UNC, E32	4
③	#28, UL2919, 3COAX + 7C + 1 + AL / MY + B, O.D: 8.5 5M	1
②	HD15F, BLACK	1
①	HD15M, 9th EMPTY, BLACK	1