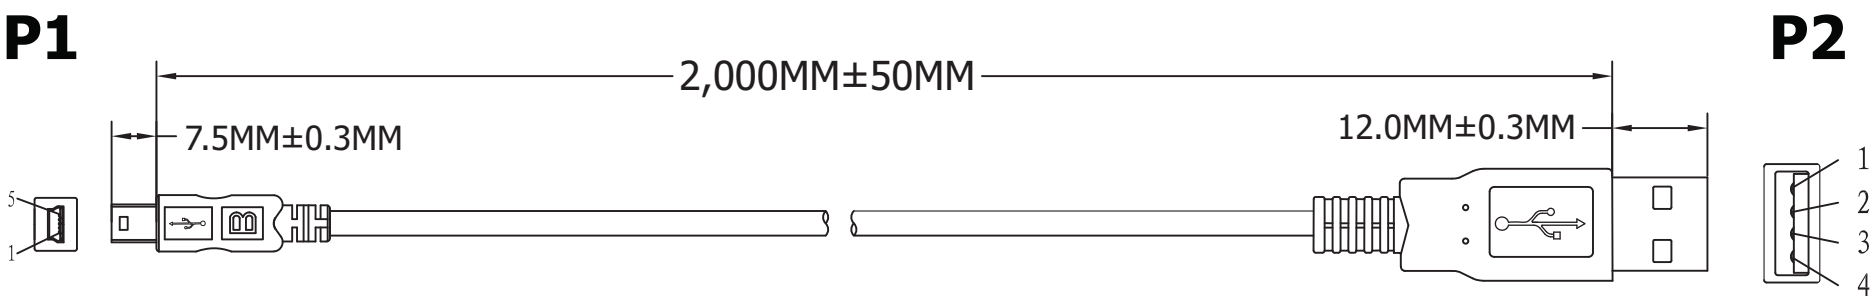

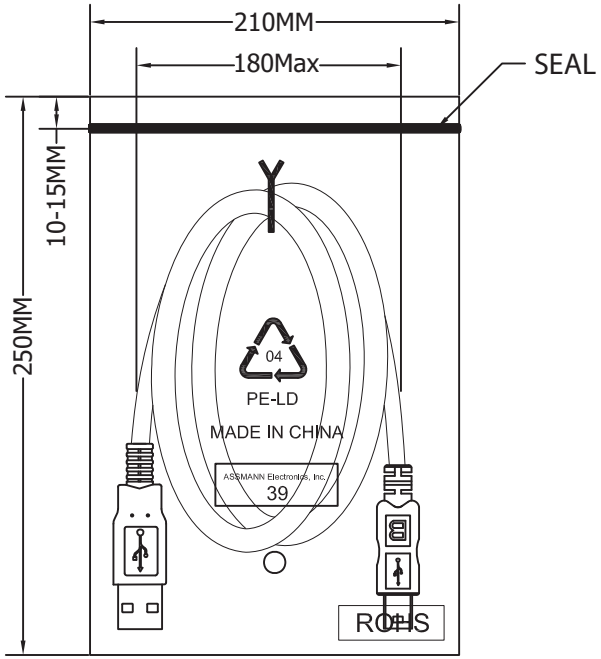

1PCS / PE BAG

PIN ASSIGNMENT

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
5	BLACK	4
SHELL	DRAIN + BRAID	SHELL

Material:
- Cable: Black USB2.0 UL2725 28#/1P+28/2C+AED
  - OD: 3.8MM
- P1 Connector: USB Mini 5P Male
  - Pin: G/F
  - 3PCS Type
  - Insulator Color: Black
  - Shell: Nickel
  - Outer Jacket: Black PVC-40P
- P2 Connector: USB A Male
  - Pin: G/F
  - 4PCS type
  - Insulator Color: White
  - Shell: Nickel
  - Outer Jacket: Black PVC-40P

Electrical:
- 100% Open short & mis wire test
- Contact Resistance: 5Ω Max.
- Insulation Resistance: 10MΩ Min.
- Dielectric Test: 300V DC

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	08.29.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AK672M/2-2-R**

Title USB 2.0 Mini Cable, Mini 5P Male <=> A Male, 30µ" Gold, 2.0 Meters

Drawing No. **rev00**

Replace | Sheet