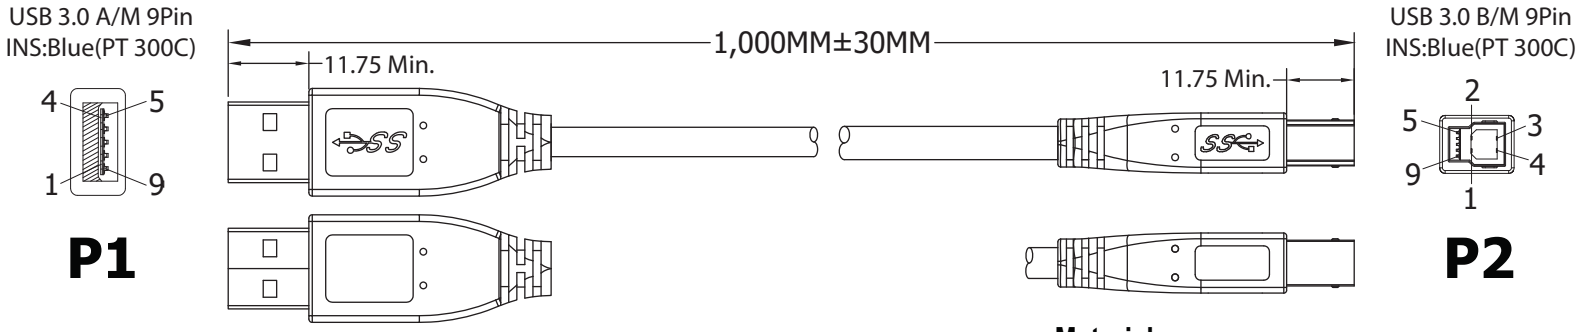

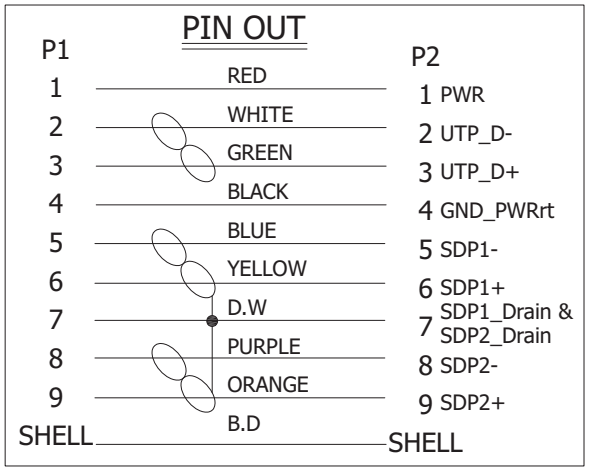

Material:

- Cable: UL-27725 [#28(7/0.1 27 T.C)*1P INS:Foam-PE+D.W (7.0127 T.C.)+AL/MY+Hot-melt-Mylar]*2C+#28(7/0.127 T.C)*1P INS:Polyolefin + #28(7/0.127 T.C)*2C INS:Polyolefin +AL/MY +B.D(85%)

- PVC Jacket

OD: 5.2±0.15MM

- Color: Black

- P1 Connector: USB 3.0 Type Male 9 Pin
- Contact: 30μ"
- Shell: Ni-Plated
- P2 Connector: USB 3.0 Type Male 9 Pin
- Contact: 30μ"
- Shell: Ni-Plated
- Hood: Molded Type, PVC 45P (Black)

Electrical:

- 100% Open short & mis wire test
  Contact Resistance: 3Ω Max.
  Insulation Resistance: 10Ω Min.
- Hi-Pot 300V DC

Unit: MM

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	08.29.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AK672/3-1-R**

Title USB 3.0 Cable, A Male <=> B Male, 9 Pin, Insulation Blue, 1 Meter

Drawing No. **rev00**

Replace | Sheet