


1 2 3 4 5 6 7

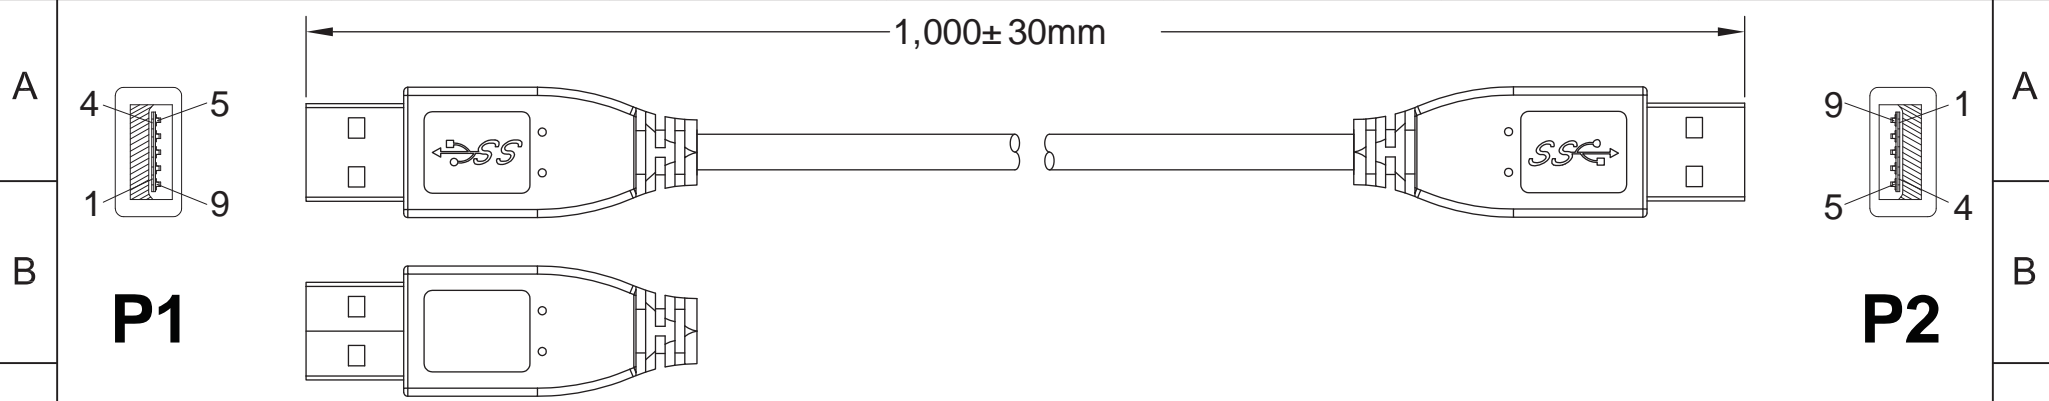

Material:

- Cable: UL-2725 [# 28(7/0.1 27 T.C)* 1P INS: Foam-PE D.W (7/0.127 T.C)+ AL/MY+ Hot-melt-Mylar]* 2C+ # 28(7/0.127 T.C)* 1P INS: Polyolefin + # 28(7/0.127 T.C)* 2C INS: Polyolefin + AL/MY + B.D(85%)
 - PVC Jacket
 - OD: 5.2±0.15MM
 - Color: Black
- P1 & P2 Connectors: USB 3.0 A Male 9 Pin
 - Contact: 30μ"
 - Shell: Ni-Plated
- Hood: Molded Type, PVC 45P (Black)

PIN OUT	
P1	P2
1 RED	1 VCC
2 WHITE	2 -DATA
3 GREEN	3 +DATA
4 BLACK	4 GND_PWRrt
5 BLUE	8 SDP1-
6 YELLOW	9 SDP1+
7 D.W	7 SDP1_Drain
8 PURPLE	7 SDP2_Drain
9 ORANGE	5 SDP2-
SHELL B.D	6 SDP2+
SHELL	SHELL

Electrical:

- 100% Open short & mis wire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 10MΩ Min.
- Hi-Pot 300V DC

Unit: mm



Scale	Free					Date	Name
TOLERANCE					Drawn	24.09.13	Wilson
X.	±0.3				Approved	24.09.13	Groll
X.X	±X						
X.XX	±X						
DIM	TOL						
X.°	±X°						
X.X°	±X°						
Angle	TOL						
Id.	Modification	Date	Name				

Title	
USB 3.0 cable	
A type Male to Male, 9 pin, 1 Meter	
ASSMANN WSW-No.	
AK670/3-1	
Drawing-No.	rev00
Replace	Sheet 1/1

1 2 3 4 5 6 7