

Material:


- Cable: USB1.1 E189529 UL2725 28#/1P+24#/2C+AEB
 - OD 4.7MM
 - Beige (IV-29#)
- P1 Connector: USB A Male Shell
 - Pin G/F
 - 4PCS Type
 - Insulator color: white
 - Shell Plate Nickel
- P2 Connector: USB A Male Shell
 - Pin G/F
 - 3PCS Type
 - Insulator color: white
 - Shell Plate Nickel
- Outer Jacket: Beige (IV-29#) PVC-40P
- 80°C 30V VW-1

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: $5M\Omega$ Min.
- Dielectric test: 300V DC

PIN Assignment:

The diagram shows a cross-section of a cable with four cores labeled 1, 2, 3, and 4. Core 1 is RED, Core 2 is WHITE, Core 3 is GREEN, and Core 4 is BLACK. The cores are arranged in a square pattern. A central rectangular area is labeled 'DRAIN+BRAID'. The entire assembly is enclosed in a 'SHELL'.

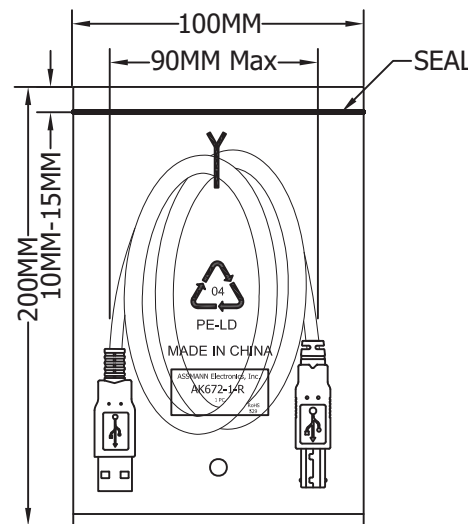

1PC / PE Bag

[illegible]

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AK672-3-R

Title	USB 1.1 Cable - A Male <=> B Male, Beige, 3 Meters
-------	--

Drawing No.

rev00

Replace

Sheet