


P1



P2

PIN ASSIGNMENT

P1 P2


1 RED 1

2 WHITE 2

3 GREEN 3

4+5 BLACK 4

SHELL DRAIN + BRAID SHELL

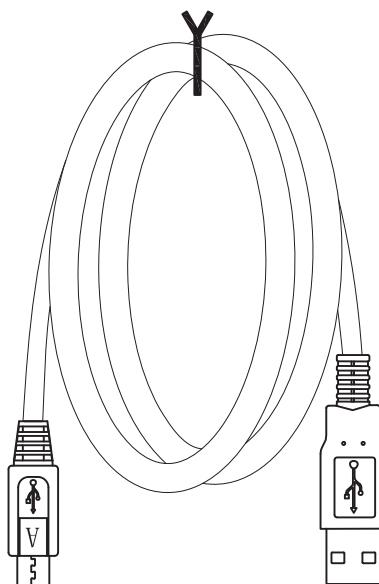

Material:

- Cable: USB2.0 UL 27725 [28AWG(7/0.1 2 T.C+AL)x1P+28AWG(7/0.12TC)x2C]+AEB(48B TC)
 - Jacket: Black
 - OD: 3.5MM
- Connector: Micro USB 5P A/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: White
- Outer Jacket: Black PVC-50P

Electrical:

- 100% Open short & mis wire test
Contact Resistance: 3Ω Max.
Insulation Resistance: 20MΩ Min.
- Hi-Pot test: 300V DC

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	
----------	--

AK67321-5-R

	Title
--	-------

USB2.0 Micro Connection Cable, 5 Meters
USB A Micro Male <=> USB A Male

Drawing No.

rev00

Replace

	Sheet
--	-------

