



HDB 15 Male
Plastic: Blue

P1




10,000MM±50MM

Thumb Screw: #4-40 UNC*4PCS

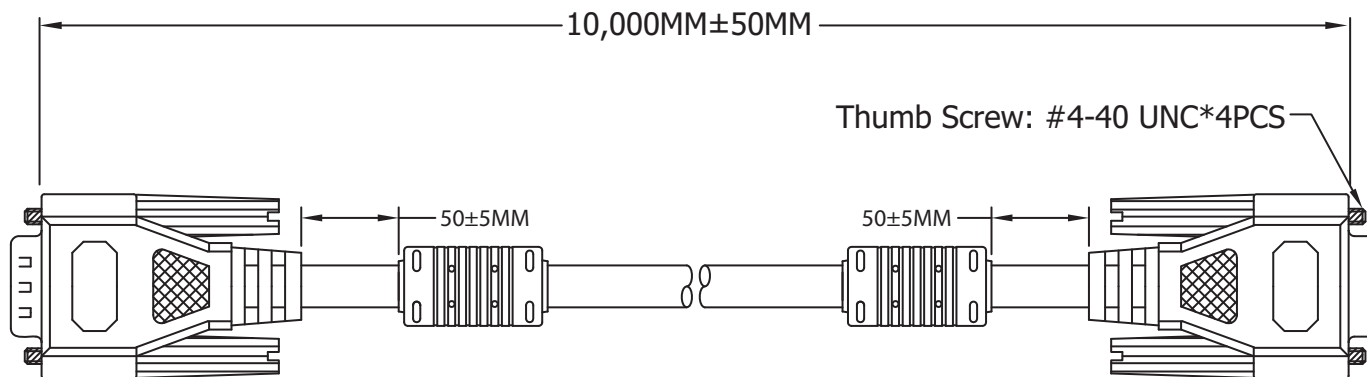

HDB 15 Female
Plastic: Blue

P2



PIN OUT



Material:

- CABLE: 28AWG(7/0.127 T.C)*3COAX(75 OHMS)+INSULATION:FO-PE INNER
JACKET:PVC OD:Ø2.5± 0.1mm(UL-1354)+28AWG(7/0.127 T.C)*7C+
INSULATION:SR-PVC ID:Ø0.85± 0.05mm(UL-1061)+AL/MY+DRAIN
WIRE:26AWG(7/0.16 T.C)+BRAID SHIELD(85%)+OUTER JACKET:PVC
COLOR:BEIGE,OD:Ø8.5± 0.15mm UL-2919
- CONNECTOR:
P1:HDB 15P MALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
(THE 9TH PIN UNLOAD)
P2:HDB 15P FEMALE,GOLD FLASH CONTACT, NICKEL PLATED SHELL
- FERRITE CORE:17.5*28.5*9.5mm
- SHIELD:COPPER-FOIL 360° SOLDERED TO CONNECTOR SHELL & CABLE BRAID
- HOOD:MOLDED TYPE,PVC 45P,COLOR:BEIGE.
- ELECTRONIC TEST: <1>.100% OPEN SHORT & MIS WIRE TEST
<2>.CONTACT RESISTANCE 3 OHMS MAX
<3>.INSULATION RESISTANCE 20M OHMS MIN
- PACKING:SEE P-0039 REV.C PACKING DRAWING
(HANKING SIZE MUST BE SMALLER THAN PACKING)
PACKING TYPF· DB VP4

⊕ = Assmann logo

RoHS
Compliant

ITEM NO.

AK3750XF-R

TITLE

Premium XGA Monitor Extension Cable - 10 Meters
w/Ferrite core, HD D-Sub 15-pin Male <=> Female

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2010 by Assmann Electronic Components
All International Rights Reserved