


DATE BY REVISION

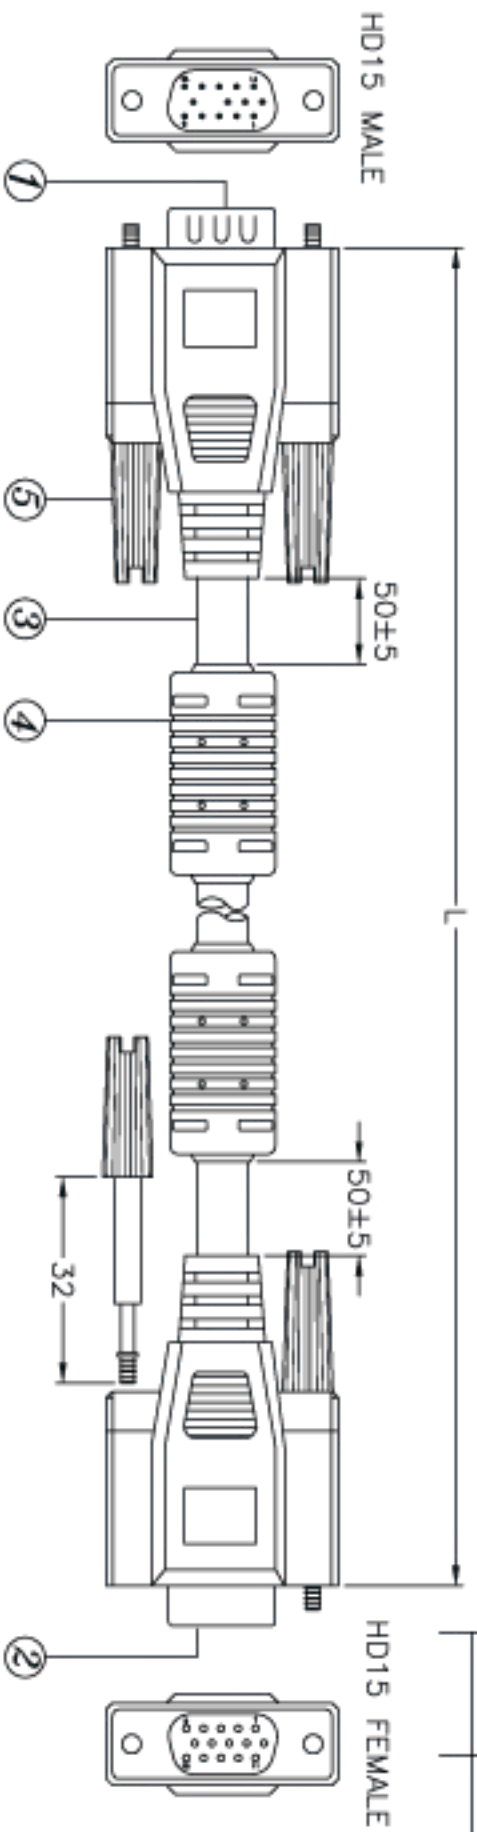


- MAT'L:
1. CABLE: #28, UL2919, 3COAX+7C+1+AL/MY+Braid, O.D:8.5
 2. CONNECTOR: HD15M, 9th EMPTY, BLACK

3. THUMBSCREW: #4-40UNC, E32
 4. FERRITE CORE: RH16x28x9
 5. COPPER TAPE: 30x50mm
 6. BLACK HEAT SHRINK TUBE: ϕ 1.0x14:6PCS
- NOTE:
 ϕ 3x8:6PCS

- NOTE:
1. TOTAL LENGTH: L
 2. COLOR: BEIGE
 3. MOLDED TYPE
 4. 360° SOLDER
 5. ROHS COMPLIANT

ITEM NO.	L
AK3915XF	15000±100mm
AK3920XF	20000±100mm

CONFIGURATION:
HD15M

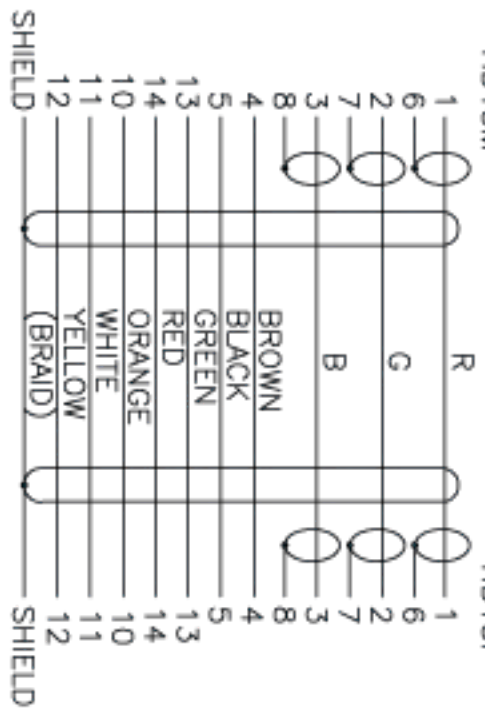

RoHS
Compliant

DATE	16 JUL, 2001	PARTS NO	MN3273N
UNIT	MM	DRAWN NO	001526
SCALE		BUYER NO	002

TITLE: HD15 MALE-HD15 FEMALE, W/2*FERRITE (MOLDED TYPE)

NO.	DESCRIPTION	QTY
⑤	THUMBSCREW: #4-40UNC, E32	4
④	FERRITE CORE: RH16x28x9	2
③	#28, UL2919, 3COAX+7C+B, O.D:8.5, BEIGE	L
②	HD15F, BLACK	1
①	HD15M, 9th EMPTY, BLACK	1

DRAWN	Y.C.C	CHECK	APPRO
	7/16		

ASSMANN ELECTRONICS, INC.