

1

2

3

4

A

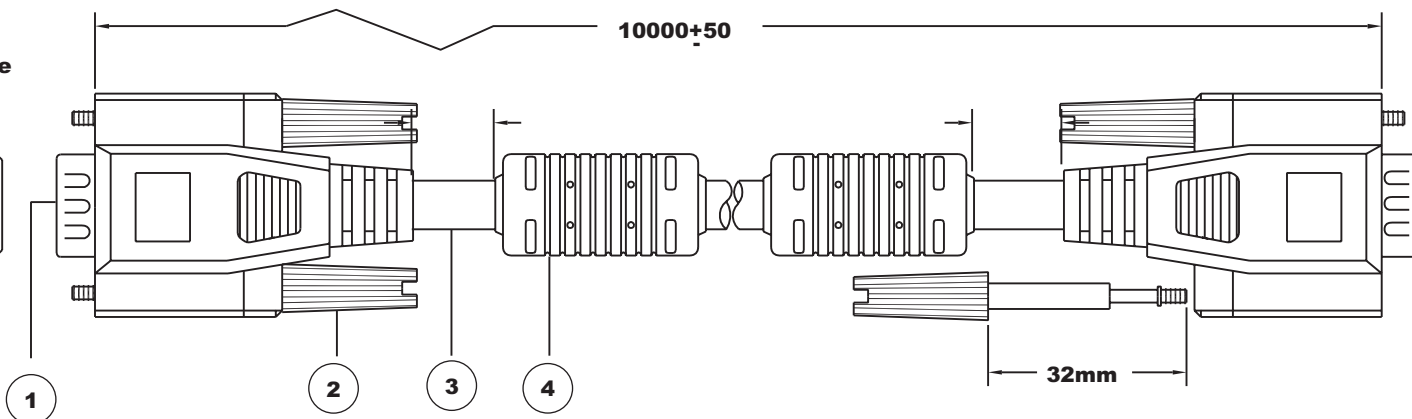
HD15 Male

HD15 Male

A

B

B

**Material:**

- 1.Cable: #28,UL2919, 3COAXIAL+7C+1+AL/MY+Braid,
(Beige PVC Jacket) O.D:8.5
- 2.Connectors: HD15M,9th Empty, Black
- 3.Thumbscrew:#4-40UNC, E32
- 4.Ferrite Core Size:RH16*28*9
- 5.Black Heat Shrink $\varnothing$ 1.5x15:6PCS $\varnothing$ 3x8:6PCS
- 6.Copper Tape:30X50

Note:

- 1.Total Length:10000±50mm
- 2.Color: Beige
- 3.Molded Type

Configuration:

HD15M

HD15M

1	Red(Coax)	1
6	Red(Ground)	6
2	Green(Coax)	2
7	Green(Ground)	7
3	Blue(Coax)	3
8	Blue(Ground)	8
4	Brown	4
5	Black	5
13	Green	13
14	Red	14
10	Orange	10
11	White	11
12	Yellow	12
Shield	(Braid)	Shield

C

C

Description

D

D

Name AK3780XF-R

HD15 Male-HD15 Male W/Copper
Foil+2Ferrite Core
ASSMANN
Electronic Components

RoHS
Compliant

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

1

2

3

4