



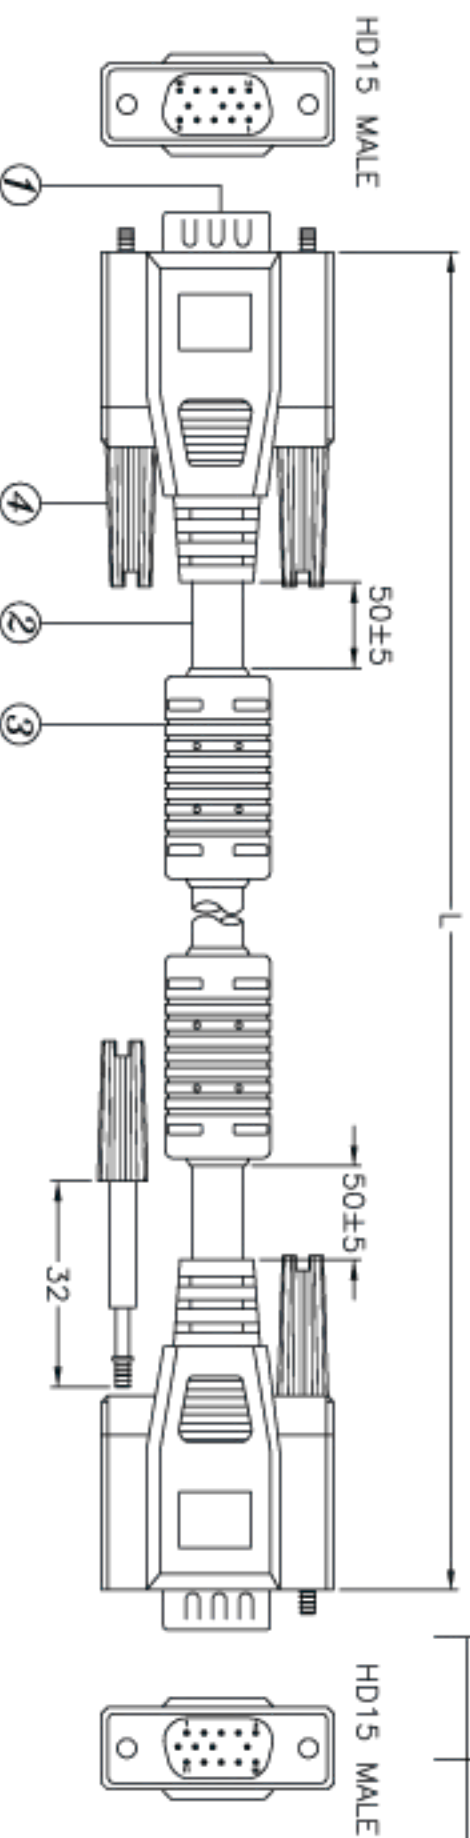

CONFIGURATION:
HD15M

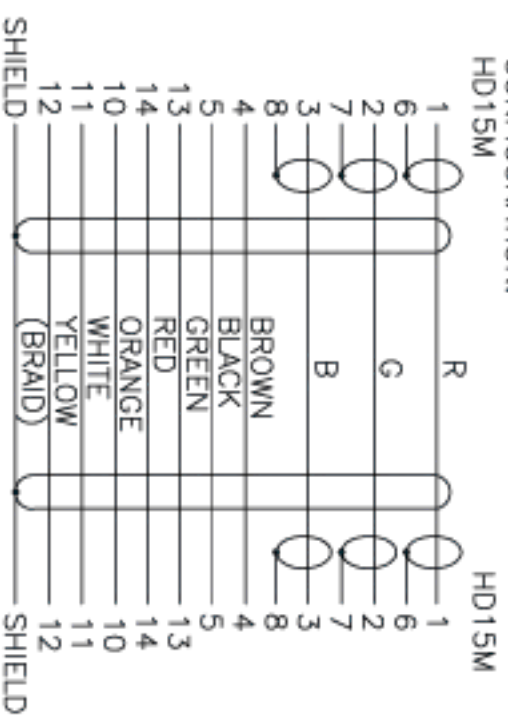

- MAT'L:
- 1.CABLE:#28,UL2919,3COAX+7C+1+AL/MY+Braid,O.D:8.5
 - 2.CONNECTOR:HD15M,9th EMPTY,BLACK
 - 3.THUMBSCREW:#4-40UNC,E32
 - 4.FERRITE CORE:RH16x28x9
 - 5.COPPER TAPE:30x50mm
 - 6.BLACK HEAT SHRINK TUBE:Ø1.0x14:6PCS
Ø3x8:6PCS

NOTE:

- 1.TOTAL LENGTH:L
- 2.COLOR:BEIGE
- 3.MOLDED TYPE
- 4.360° SOLDER
- 5.ROHS COMPLIANT

ITEM NO.	L
AK3815XF	15000±100mm
AK3820XF	20000±100mm

RoHS
Compliant

DATE	16 JUL,2001	PARTS NO	MN3271N
UNIT	MM	DRAWN NO	001525
SCALE		BUYER NO	002

TITLE:

HD15 MALE-HD15 MALE,W/2*FERRITE
(MOLDED TYPE)

④	THUMBSCREW:#4-40UNC,E32	4
③	FERRITE CORE:RH16x28x9	2
②	#28,UL2919,3COAX+7C+B,O.D:8.5,BEIGE	L
①	HD15M,9th EMPTY,BLACK	2
NO.	DESCRIPTION	QTY

DRAWN Y.C.C
7/16

CHECK

APPRO

ASSMANN ELECTRONICS,INC.