
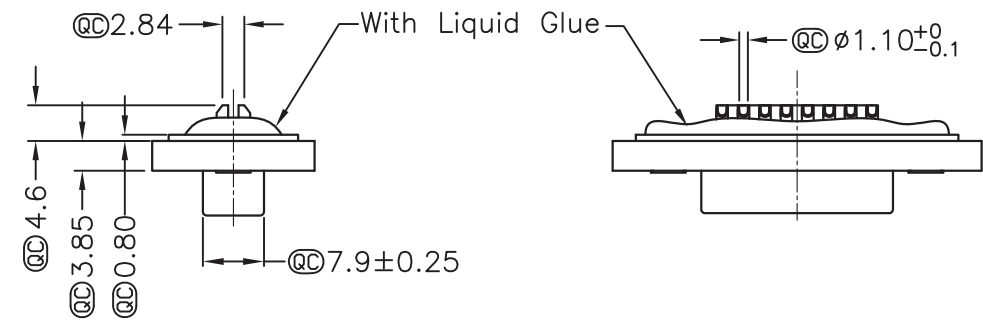
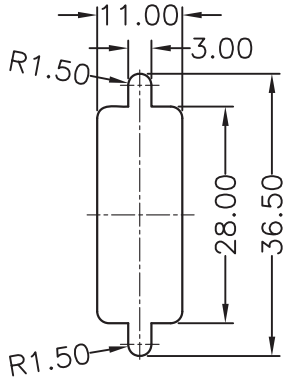
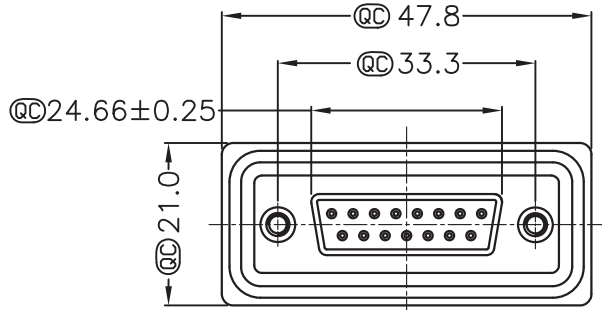
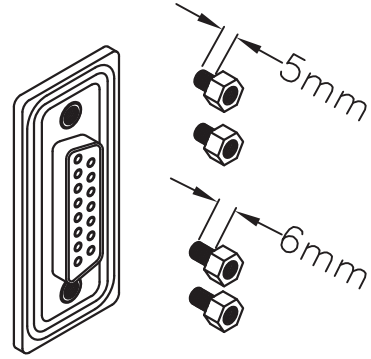



	1	2	3	4	5	6	7																																																																																											
A	 Panel Thickness X(Max.)		 QC 2.84 QC 4.6 QC 3.85 QC 0.80 QC 7.9±0.25 With Liquid Glue QC Ø1.10±0.1				A																																																																																											
B	Screw L=5.0 For Panel Thickness Under 1.2mm								B																																																																																									
C	Screw L=6.0 For Panel Thickness Between 1.2~2.0mm		QC = Important Dimension						C																																																																																									
D	 11.00 3.00 R1.50 28.00 36.50 R1.50		 QC 47.8 QC 33.3 QC 24.66±0.25 QC 21.0				D																																																																																											
E	Recommended Panel Cut-Out		 5mm 6mm				Material: - Waterproof Rate: IP67 - Connector: Black, Nylon + GF - Pin: Copper Alloy, Gold Plated - Applicable Wire Range: 22AWG - 26AWG - Insulators: PBT - Max Torque on hex stand off: 9.92LB Electrical: - Current Rating: 5A - Dielectric voltage: 500V AC / 1 Minute - Insulation resistance: >500MΩ Min. - Operating Temperature: -40°C to +105°C	E																																																																																										
F									F																																																																																									
G			<table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td></td><td>Name</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X</td><td>±0.40</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>11.22.11</td><td>Chappell</td></tr><tr><td>X.XX</td><td>±0.25</td><td></td><td></td><td></td><td></td><td>Approved</td><td></td><td></td></tr><tr><td>X.XXX</td><td>±0.15</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>±3°</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>				Scale	1:1							Name	TOLERANCE									X.X	±0.40					Drawn	11.22.11	Chappell	X.XX	±0.25					Approved			X.XXX	±0.15								Angle	±3°																										<table><tr><td colspan="2">Item No.</td><td rowspan="2">A-DF15LL-WP-R</td></tr><tr><td colspan="3">Title</td></tr><tr><td colspan="3">D-Sub Connector Waterproof, Solder Cup Version, Female, 15 Pin</td></tr><tr><td colspan="2">Drawing No.</td><td></td></tr><tr><td colspan="2">Replace</td><td></td></tr><tr><td colspan="2">Sheet</td><td></td></tr></table>	Item No.		A-DF15LL-WP-R	Title			D-Sub Connector Waterproof, Solder Cup Version, Female, 15 Pin			Drawing No.			Replace			Sheet			G
Scale	1:1							Name																																																																																										
TOLERANCE																																																																																																		
X.X	±0.40					Drawn	11.22.11	Chappell																																																																																										
X.XX	±0.25					Approved																																																																																												
X.XXX	±0.15																																																																																																	
Angle	±3°																																																																																																	
Item No.		A-DF15LL-WP-R																																																																																																
Title																																																																																																		
D-Sub Connector Waterproof, Solder Cup Version, Female, 15 Pin																																																																																																		
Drawing No.																																																																																																		
Replace																																																																																																		
Sheet																																																																																																		
H			<table><tr><td>Modification</td><td>Date</td><td>Name</td></tr><tr><td></td><td></td><td></td></tr></table>				Modification	Date	Name				<table><tr><td colspan="2">rev00</td></tr></table>	rev00		H																																																																																		
Modification	Date	Name																																																																																																
rev00																																																																																																		
	1	2	3	4	5	6	7																																																																																											