

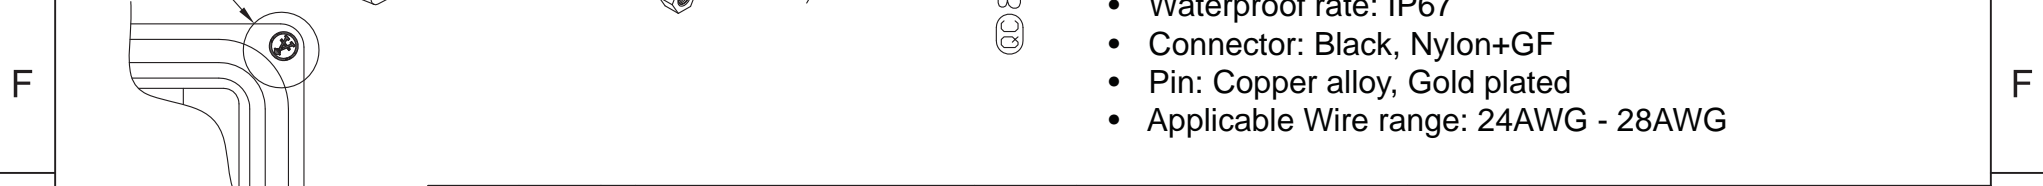
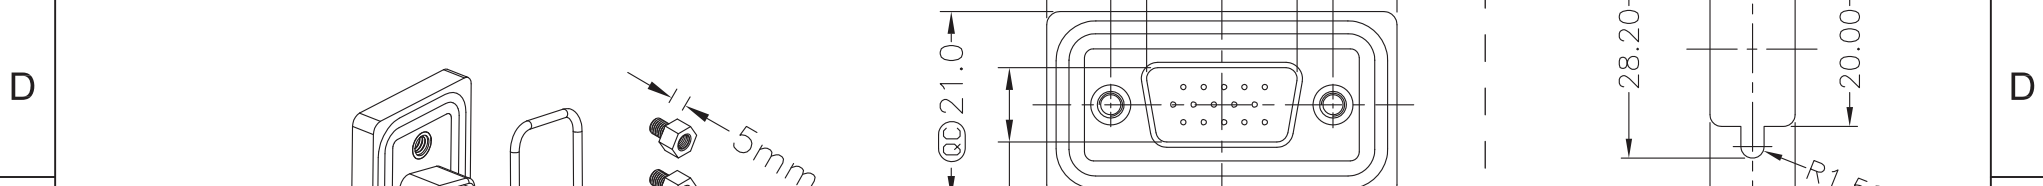
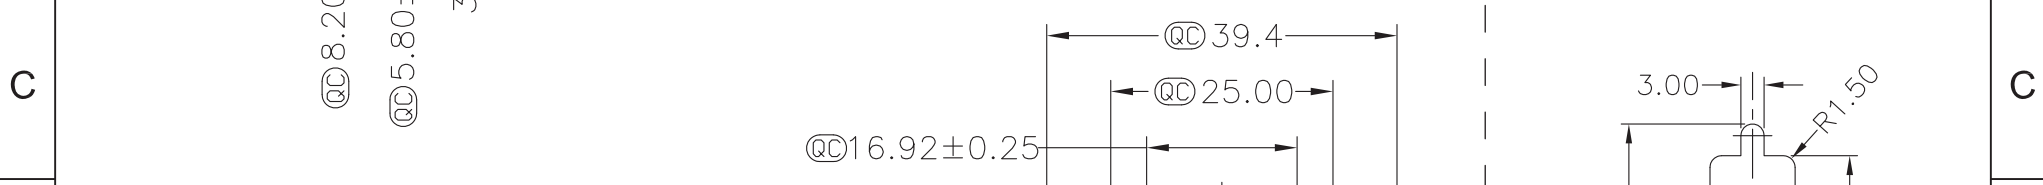


1 2 3 4 5 6 7

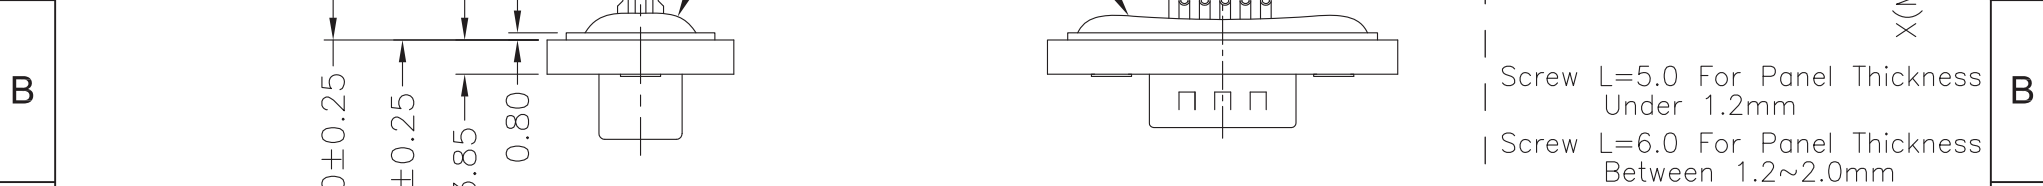

- Material:**
- Waterproof rate: IP67
 - Connector: Black, Nylon+GF
 - Pin: Copper alloy, Gold plated
 - Applicable Wire range: 24AWG - 28AWG



Unit: mm



Scale	Free					Date	Name	Title Waterproof DSub connector High Density, Solder Cup 15 pin, Male	
TOLERANCE						Drawn	30.11.11		Chappell
X.X	±0.25					Approved		ASSMANN WSW-No.	
X.XX	±0.10							A-HDS-15-LL-WP	
X.XXX	±0.05							Drawing-No.	
DIM	TOL							rev00	
X.°	±1°							Replace	Sheet
X.X°	±X°								1/1
Angle	TOL	Id.	Modification	Date	Name	<small>1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</small>			

1 2 3 4 5 6 7