

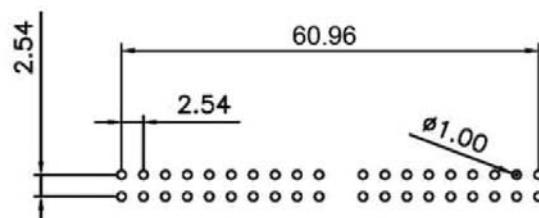
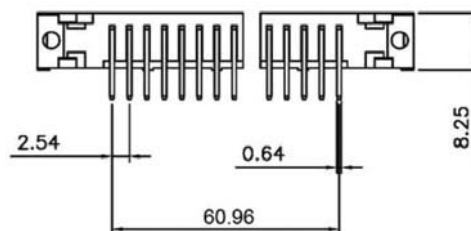


A

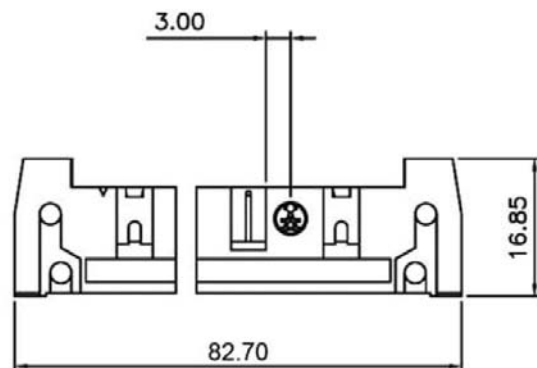

RECOMMENDED P.C.B LAYOUT
TOLERANCES: $\pm 0.05\text{mm}$



Materials:

- Insulator: Glass-Filled thermoplastic, UL94V-0
- Color: Grey
- Contact: Brass
- Contact Plating:
 - Mating area: Flash Gold over Nickel
 - Solder area: Tin over Nickel
- Operating Temperature: -40°C ~ +105°C

Electrical:

- Current Rating: 1 Amp
- Contact Resistance: 20MΩ Max @ 1A DC
- Dielectric voltage: 500V AC/rms, 60Hz min.
- Test voltage: 1,000V rms

Tolerance: ± 0.2

Units: MM

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AWH50A-0202-T-R

Title	Header - Angled Pins, Pitch 2.54MM x 2.54MM, 50 Contacts
--------------	--

Drawing No.

rev00

Replace

Sheet

RoHS Complaint

ASSMANN
VVS components

H