


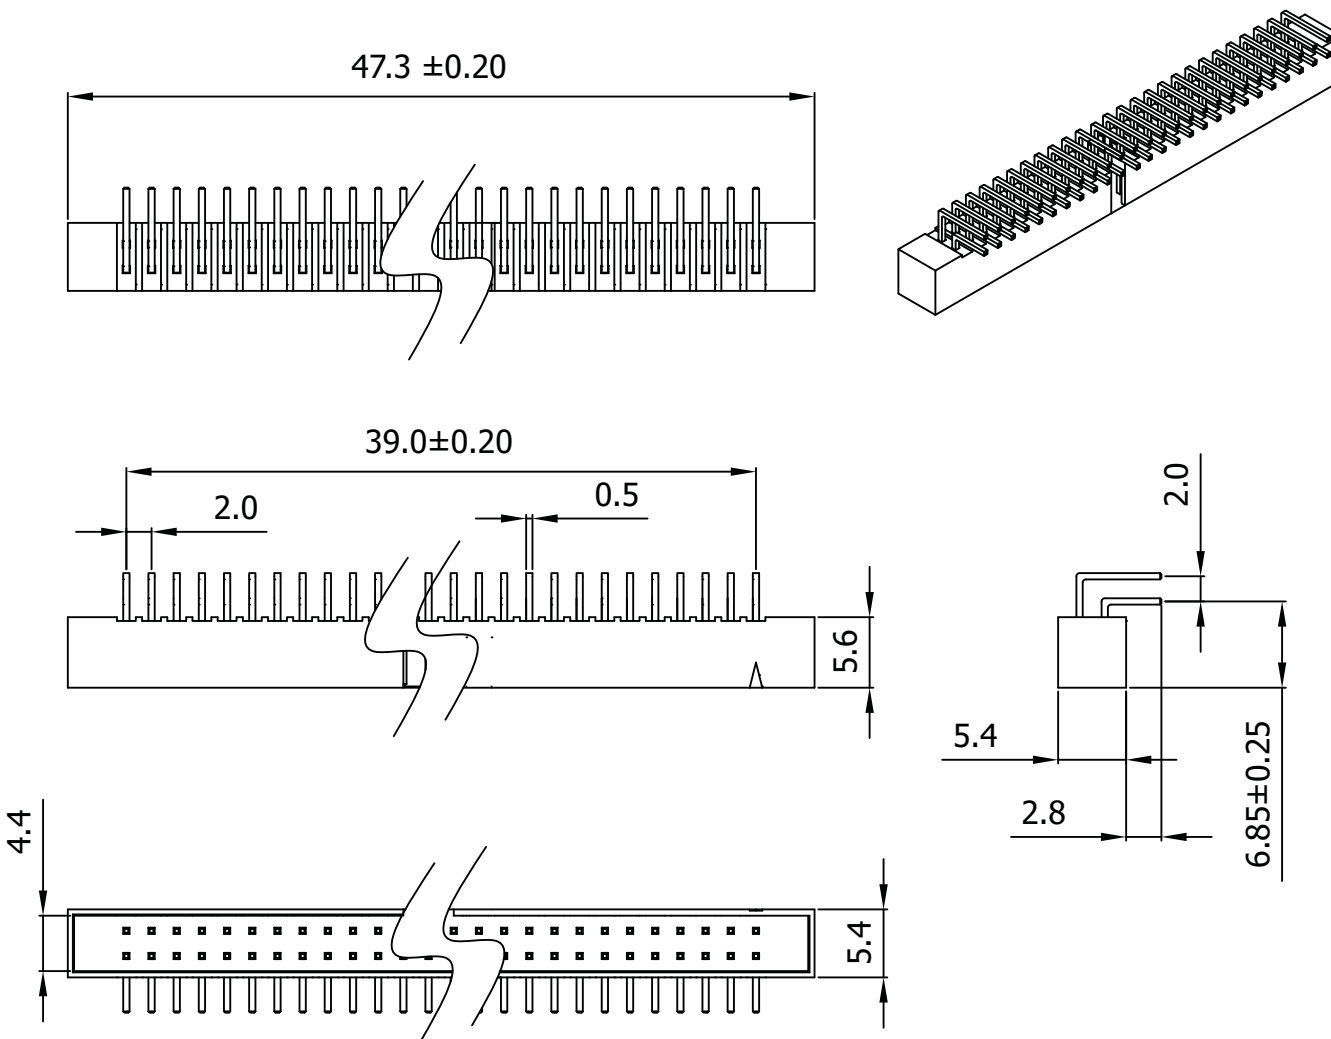


### Material:

- Insulator: Polyester, UL 94V-0
- Contact Material: Copper Alloy
- Finish: Gold Plated
- Standard: Gold flash, PA6T

### Electrical:

- Current Rating: 1Amp
- Insulation Resistance: 5,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -40°C ~ +105°C

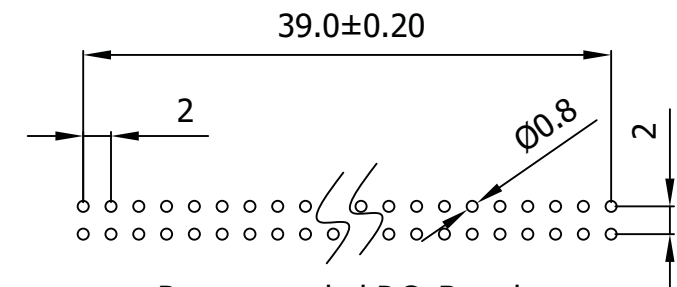

Recommended P.C. Board  
Tolerances:  $\pm 0.05\text{mm}$   
Hole Layout

Unit: MM $\pm 0.30\text{MM}$

Ⓐ = Assmann logo

**RoHS**  
Compliant

ITEM NO.

**AWHW2-40A-0202-T-R**

TITLE

IDC Box Header Right Angle - 2.00MM Pitch,  
Gold flash, 40 Contacts

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: [info@usa-assmann.com](mailto:info@usa-assmann.com)

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved