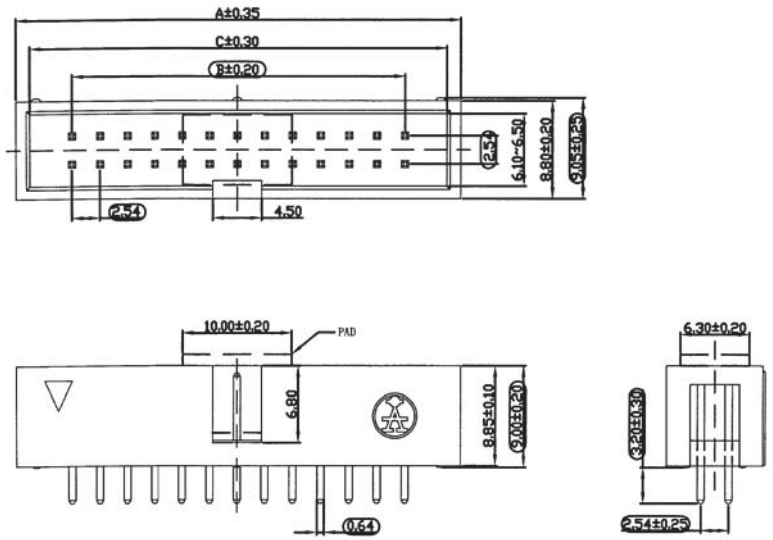



	1	2	3	4	5	6	7																																																																												
A								A																																																																											
B								B																																																																											
C								C																																																																											
D								D																																																																											
E	 RECOMMENDED P.C.B BOARD HOLE LAYOUT TOLERANCES: ± 0.05mm Material: - Insulator: Polyester (UL94V-0) - Insulator Standard: PBT - Contact: Brass - Contact Plating: Tin, Gold Flash or 30µ" Gold (Selective) Electrical: - Current Rating: 3A - Contact Resistance: 20mΩ Max. - Insulation Resistance: 5,000MΩ Min. - Withstanding Voltage: AC 1,000V - Operation Temperature: -40°C to +105°C <td>E</td>							E																																																																											
F								F																																																																											
G								G																																																																											
H								H																																																																											
Unit: mm		<table><tr><td>Scale</td><td>as shown</td><td></td><td></td><td></td><td></td><td>Date</td><td>Name</td><td rowspan="2">Title Boxheader - Low Profile 10-64 pin, straight pin, 2.54mm pitch</td></tr><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>13.03.13</td><td>Wilson</td></tr><tr><td>X.</td><td>±0.50</td><td></td><td></td><td></td><td></td><td rowspan="3">Approved</td><td rowspan="3">13.03.13</td><td rowspan="3">Groll</td></tr><tr><td>X.X</td><td>±0.35</td><td></td><td></td><td></td><td></td></tr><tr><td>X.XX</td><td>±0.25</td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td colspan="2" rowspan="3"></td><td rowspan="3">Drawing-No.</td><td rowspan="3">rev01</td></tr><tr><td>X.°</td><td>±1°</td><td></td><td></td><td></td><td></td></tr><tr><td>X.X°</td><td>±0.5°</td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>①</td><td>Updated all information</td><td>13.03.13</td><td>Wilson</td><td colspan="2">Replace</td><td>Sheet</td></tr><tr><td></td><td></td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td colspan="2">1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</td><td>1/1</td></tr></table>		Scale	as shown					Date	Name	Title Boxheader - Low Profile 10-64 pin, straight pin, 2.54mm pitch	TOLERANCE						Drawn	13.03.13	Wilson	X.	±0.50					Approved	13.03.13	Groll	X.X	±0.35					X.XX	±0.25					DIM	TOL							Drawing-No.	rev01	X.°	±1°					X.X°	±0.5°					Angle	TOL	①	Updated all information	13.03.13	Wilson	Replace		Sheet			Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		1/1	
Scale	as shown					Date	Name	Title Boxheader - Low Profile 10-64 pin, straight pin, 2.54mm pitch																																																																											
TOLERANCE						Drawn	13.03.13		Wilson																																																																										
X.	±0.50					Approved	13.03.13	Groll																																																																											
X.X	±0.35																																																																																		
X.XX	±0.25																																																																																		
DIM	TOL							Drawing-No.	rev01																																																																										
X.°	±1°																																																																																		
X.X°	±0.5°																																																																																		
Angle	TOL	①	Updated all information	13.03.13	Wilson	Replace		Sheet																																																																											
		Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		1/1																																																																											
	1	2	3	4	5	6	7																																																																												