
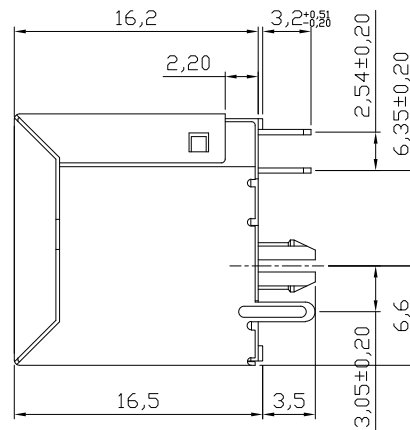



ADD-1(W)>8,5(L)>1,25(H)

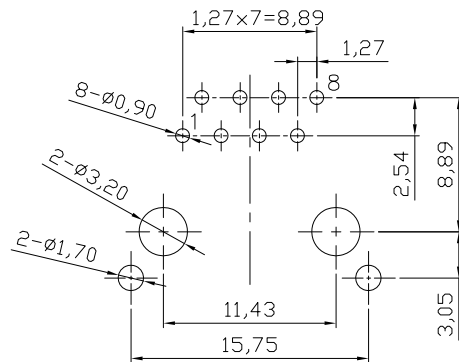

PC Board Layout
Component Side Shown

NOTES:

Mechanical:

1. Housing material : Polyester UL94V-0 , Color: Black
2. Contact material: Phosphor Bronze $t=0.35\text{mm}$
3. Contact plating: Contact area---Selective gold plating
Tails---Tin plated all over 50u" Nickel
4. Shell material: Copper Alloy
5. Shell plating: Nickel plated
6. Operating Life: 750 Cycles min.
7. PCB Retention Pre-solder: 1 LB min.
8. PCB Retention Post-solder: 10 LBS min.

Electrical:

1. Voltage Rating: 125VAC.
2. Current Rating: 1.5AMP.
3. Contact Resistance: 30mΩ max.
4. Insulation Resistance: 1000MΩ min. @ 500 VDC
5. Dielectric Strength: 1000 VAC 60Hz, 1 min.
Pin to Pin 1000 VAC RMS 60Hz, 1min.
Pin to Shield 1500 VAC RMS 60Hz, 1min.

Environmental:

1. Storage: -40°C To +85°C
2. Operation: -40°C~+85°C
3. Wave Soldering Temp: 200~220°C(5~10S)
- Packing: 60pcs/Tray, 1440pcs/Carton

Order code: A-2014-2S-X-N

Contact plating:

- 1: selective 15u" gold
- 2: selective 30u" gold
- 3: selective 50u" gold
- 4: selective 6u" gold

RoHS compliant
Unit:mm

Scale	Free						Date	Name	Customer-No.
TOLERANCE					Drawn	27.05.2013	Amy		
X.X	±0.20				Approved	27.05.2013	Amy		
X.XX	±0.15								
X.XXX	±0.10								
DIM	TOL								
		①	Drawn	27.05.2013	Amy				
Angle	±5°	Id.	Modification	Date	Name				

Customer-No.		ASSMANN WSW-No.		A-2014-2S-X-N	
Drawing-No.		ASS 5708 CO		rev00	
Replace		SHEET			