

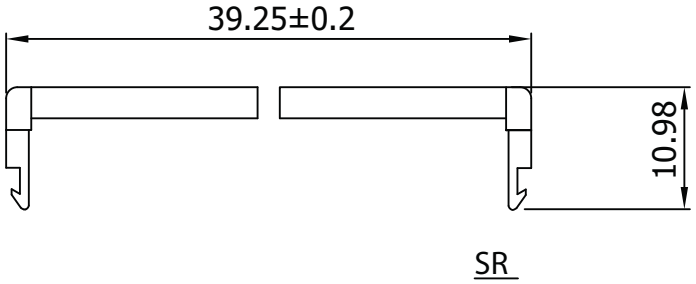

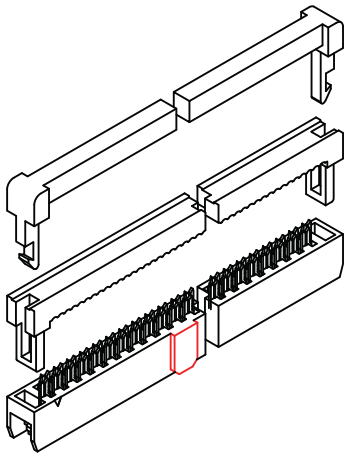

I.D.C SOCKET DUAL-ROW

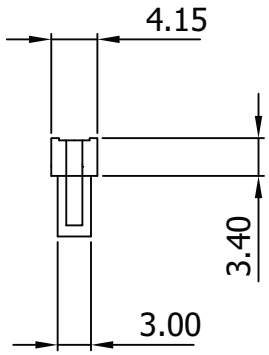

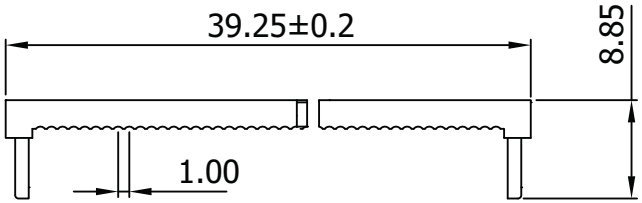

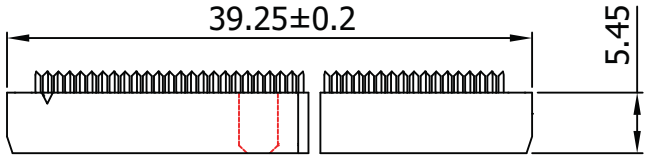



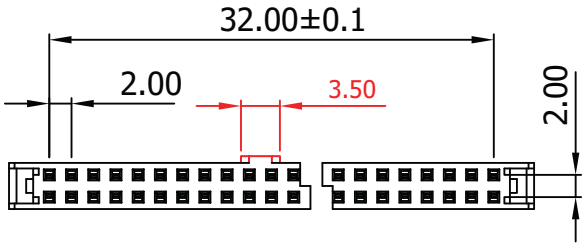

Material:

- Insulator: P.B.T. 30% Glass Fiber, UL 94V-0
- Contact Material: Phosphor Bronze, Gold flash over Nickel

Electrical:

- Current Rating: 1Amp DC
- Insulation Resistance: 1,000MΩ Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C

Unit: MM±0.30MM

RoHS Complaint

Scale	1:1						Name	Item No. AWP2-34-7241-T-R
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		Title IDC-Socket - 2.00MM Pitch, Gold Flash, Central Lug w/Strain Relief, 34 Contacts
X.XX	±0.25							
X.XXX	±0.15							Drawing No. rev00
Angle	±3°							
			Modification	Date	Name			Replace / Sheet

ASSMANN WSW components