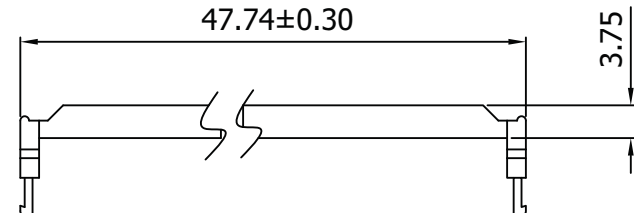

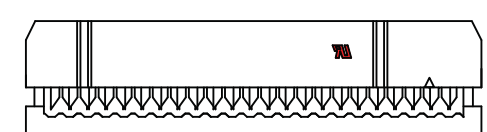
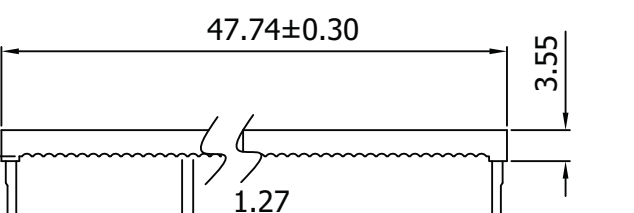

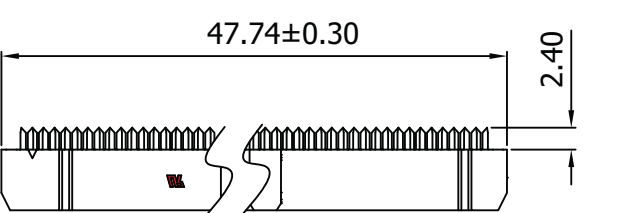

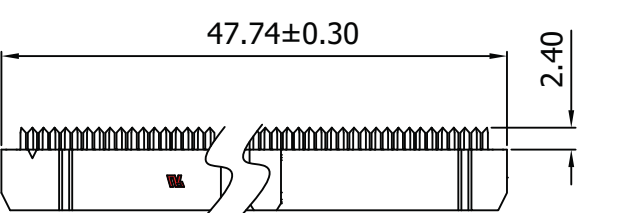
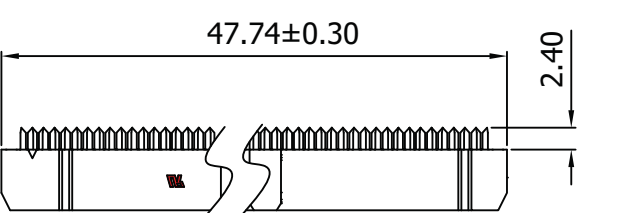
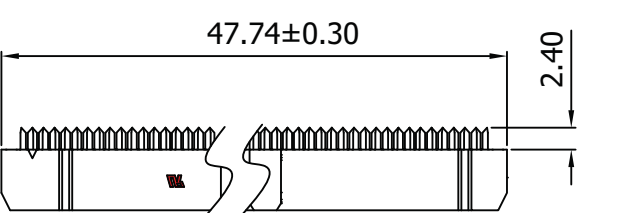


	1	2	3	4	5	6	7															
A								A														
B								B														
C								C														
D								D														
E								E														
F								F														
Unit: MM±0.20MM																						
G	RoHS Complaint <table><tr><td>Scale</td><td>1:1</td></tr><tr><td>TOLERANCE</td><td></td></tr><tr><td>X.X</td><td>±0.40</td></tr><tr><td>X.XX</td><td>±0.25</td></tr><tr><td>X.XXX</td><td>±0.15</td></tr><tr><td>Angle</td><td>±3°</td></tr></table>			Scale	1:1	TOLERANCE		X.X	±0.40	X.XX	±0.25	X.XXX	±0.15	Angle	±3°			Name Drawn 10.19.11 Chappell		Item No. AWP34-7241-T-R		G
Scale	1:1																					
TOLERANCE																						
X.X	±0.40																					
X.XX	±0.25																					
X.XXX	±0.15																					
Angle	±3°																					
H						Title IDC-Socket - 2.54MM Pitch, Gold Flash, Central Lug w/Strain Relief, 34 Contacts		H														
				ASSMANN components		Drawing No. rev00																
				Modification Date Name		Replace Sheet																
	1	2	3	4	5	6	7															