
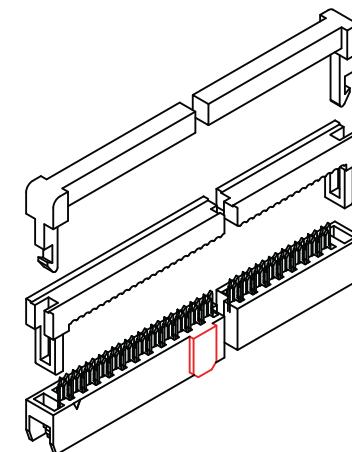
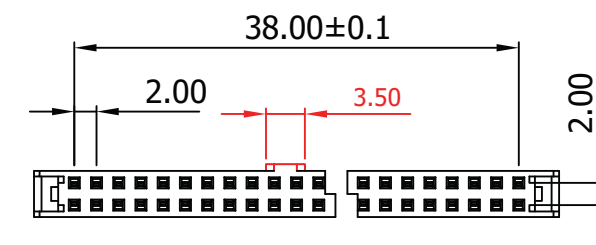
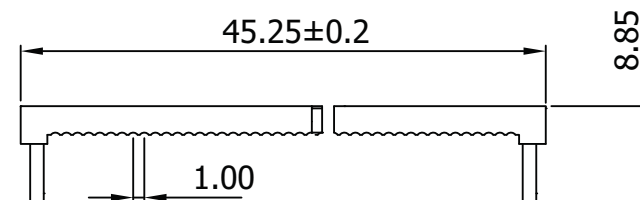


SR

I.D.C SOCKET DUAL-ROW

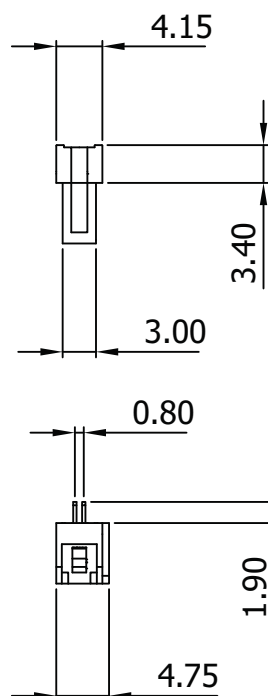

Material:

- Insulator: P.B.T. 30% Glass Fiber, UL 94V-0
- Contact Material: Phosphor Bronze, Gold flash over Nickel

Electrical:

- Current Rating: 1Amp DC
- Insulation Resistance: 1,000M Ω Min.
- Dielectric Withstanding: 500V AC
- Operating Temperature: -55°C ~ +105°C

Unit: MM $\pm$ 0.30MM

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			



Item No.	
----------	--

AWP2-40-7241-T-R

Title	IDC-Socket - 2.00MM Pitch, Gold Flash, Central Lug w/Strain Relief, 40 Contacts
--------------	---

Drawing No.

rev00

Replace

	Sheet
--	-------