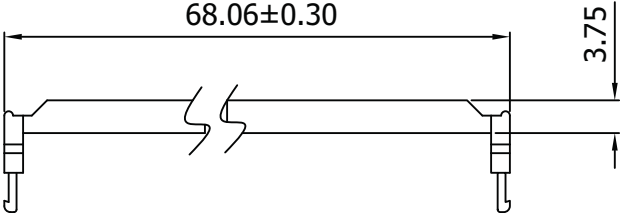

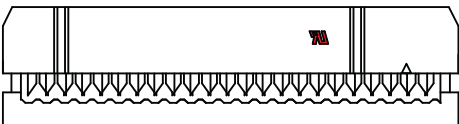
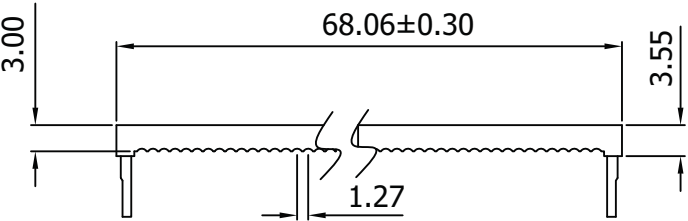

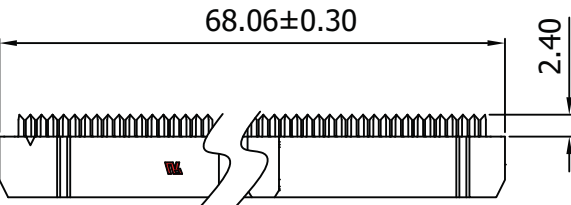

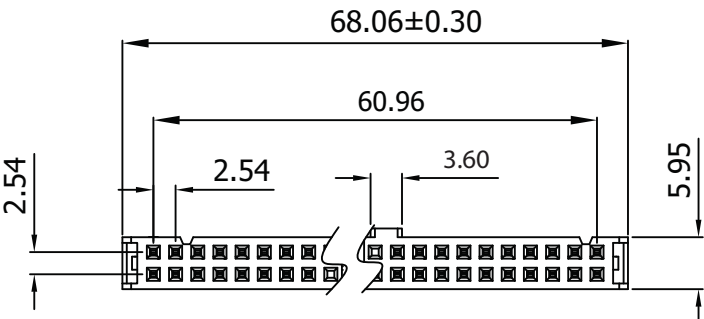


	1	2	3	4	5	6	7																																																																																																				
A								A																																																																																																			
B								B																																																																																																			
C								C																																																																																																			
D						Material: • Insulator: P.B.T. 30% Glass Fiber, UL 94V-0 • Contact Material: Phosphor Bronze, Gold flash over Nickel Electrical: • Current Rating: 1Amp • Insulation Resistance: 1,000MΩ Min. • Contact Resistance: 30MΩ Max. • Dielectric Withstanding: 500V AC • Operating Temperature: -40°C ~ +85°C		D																																																																																																			
E												E																																																																																															
F								F																																																																																																			
G	RoHS Complaint			<table><tr><td>Scale</td><td>1:1</td><td></td><td></td><td></td><td></td><td></td><td>Name</td></tr><tr><td>TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X.X</td><td>±0.40</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>10.19.11</td></tr><tr><td>X.XX</td><td>±0.25</td><td></td><td></td><td></td><td></td><td>Approved</td><td></td></tr><tr><td>X.XXX</td><td>±0.15</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>±3°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>			Scale	1:1						Name	TOLERANCE								X.X	±0.40					Drawn	10.19.11	X.XX	±0.25					Approved		X.XXX	±0.15							Angle	±3°																																							<table><tr><td colspan="2">Item No.</td><td rowspan="2">AWP50-7241-T-R</td></tr><tr><td colspan="3">Title</td></tr><tr><td colspan="3">IDC-Socket - 2.54MM Pitch, Gold Flash, Central Lug w/Strain Relief, 50 Contacts</td></tr><tr><td colspan="2">Drawing No.</td><td rowspan="2">rev00</td></tr><tr><td colspan="3">Replace</td></tr><tr><td colspan="2">Sheet</td><td></td></tr></table>		Item No.		AWP50-7241-T-R	Title			IDC-Socket - 2.54MM Pitch, Gold Flash, Central Lug w/Strain Relief, 50 Contacts			Drawing No.		rev00	Replace			Sheet			G
Scale	1:1						Name																																																																																																				
TOLERANCE																																																																																																											
X.X	±0.40					Drawn	10.19.11																																																																																																				
X.XX	±0.25					Approved																																																																																																					
X.XXX	±0.15																																																																																																										
Angle	±3°																																																																																																										
Item No.		AWP50-7241-T-R																																																																																																									
Title																																																																																																											
IDC-Socket - 2.54MM Pitch, Gold Flash, Central Lug w/Strain Relief, 50 Contacts																																																																																																											
Drawing No.		rev00																																																																																																									
Replace																																																																																																											
Sheet																																																																																																											
H				ASSMANN components					H																																																																																																		
	1	2	3	4	5	6	7																																																																																																				