
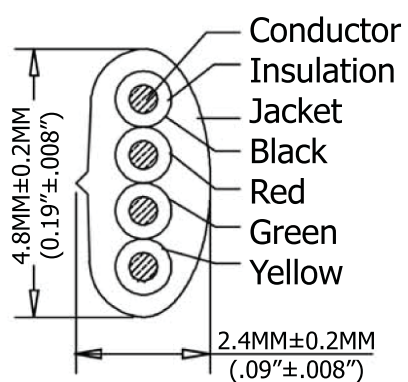


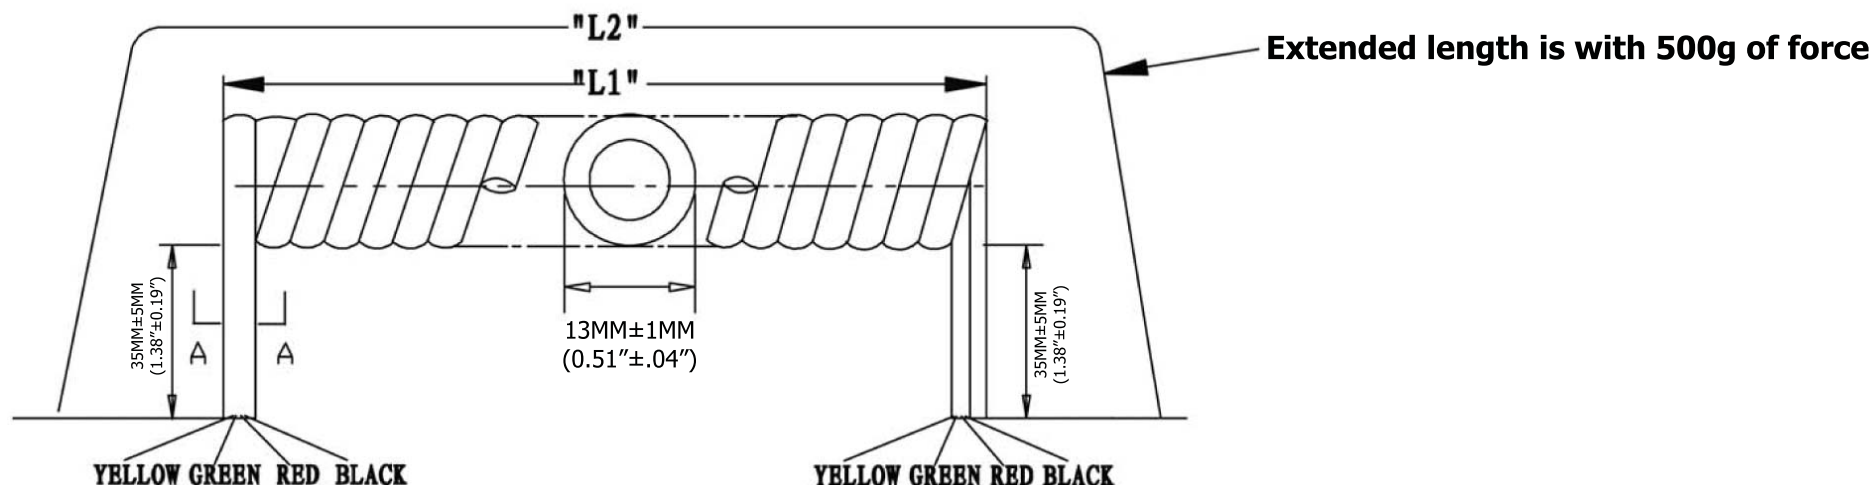

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches	13.0 Inches
1,524.0MM-1,752.6MM	330.2MM

Material:

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C):PP6331 ID 0.95-1.0
- Jacket: PVC NO UL 80P
- Package: Individual PE Bag

SEC:A-A



Scale	1:1							Name
TOLERANCE						Drawn	12.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	
----------	--

AT-K-C-26-4-B/5-R

Title	NON-UL 26AWG (0.16/7)*4C, O.D.: 2.4*4.8MM, Pre-Cut, 5Ft., Black
--------------	--

Drawing No.

rev00

Replace

Sheet
