


Extended length is with 500g of force

Materials:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

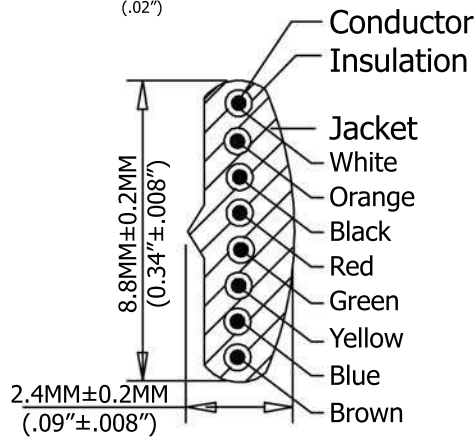

SEC: A-A

| P1 | | P2 |
|----|--------|----|
| 1 | WHITE | 1 |
| 2 | ORANGE | 2 |
| 3 | BLACK | 3 |
| 4 | RED | 4 |
| 5 | GREEN | 5 |
| 6 | YELLOW | 6 |
| 7 | BLUE | 7 |
| 8 | BROWN | 8 |

| Extended Length ("L2") | Typical Retracted Length ("L1") |
|---------------------------|---------------------------------|
| 84.0 Inches - 96.6 Inches | 39.5 Inches |
| 2,133.6MM-2,453.64MM | 1,003.3MM |



ITEM NO

AT-C-26-8/8/S-7/R-R

TITLE NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM

Reverse Plug, 50µ" of contact plating, SILVER

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2009 by Assmann Electronic Components
All International Rights Reserved