


Extended length is with 500g of force

**Materials:**

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36" [.014MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainder
  - Over 2.54µm [.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

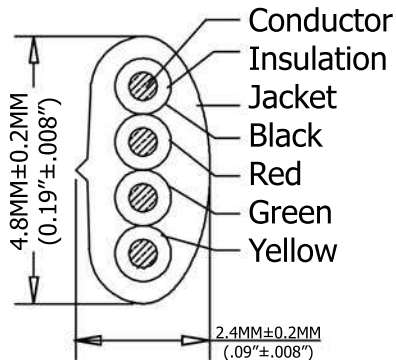

**TERMINATION:**

| P1 | P2 | COLOR  |
|----|----|--------|
| 1  | 4  | BLACK  |
| 2  | 3  | RED    |
| 3  | 2  | GREEN  |
| 4  | 1  | YELLOW |

| Extended Length ("L2")      | Typical Retracted Length ("L1") |
|-----------------------------|---------------------------------|
| 120.0 Inches - 138.0 Inches | 25 Inches                       |
| 3,048.0MM-3,505.2MM         | 635.0MM                         |

SEC:A-A



ITEM NO  
**AT-C-26-4/4/W-10-R**  
 TITLE NON-UL 26AWG (0.16/7)\*4C, O.D.: 2.4\*4.8MM  
 Standard Plug, 50µ" of contact plating, WHITE

**ASSMANN**  
 Electronics, Inc.  
 1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283  
 Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
 © Copyright 2009 by Assmann Electronic Components  
 All International Rights Reserved