


	1	2	3	4	5	6	7	
A	RoHS compliant							A
B								B
C								C
D								D
E								E
F								F
G								G
H								H
	1	2	3	4	5	6	7	

RoHS compliant

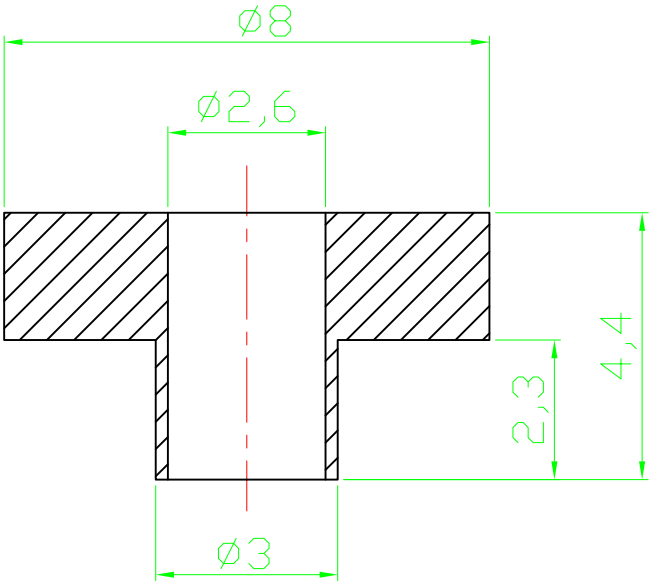

Notes
Material:SR25
Dielectric strength: 380kV/cm
Heat resistance:215°C
Tensile strength: 80N/mm

Scale	1:1					Date	Name	Customer-No.		
TOLERANCE						Drawn	20.08.2009	Dean		
X.	±X					Approved	10.03.2010	Andy	ASSMANN WSW-No. V5817	
X.X	±X									
X.XX	±X									
DIM	TOL	②	Modify drawing layout	10.03.2010	Andy				Drawing-No.	
X.°	±X°								ASS 0489A HS	rev02
X.X°	±X°	①	Drawn	20.08.2009	Dean					
Angle	TOL	Id.	Modification	Date	Name				Replace	Sheet