
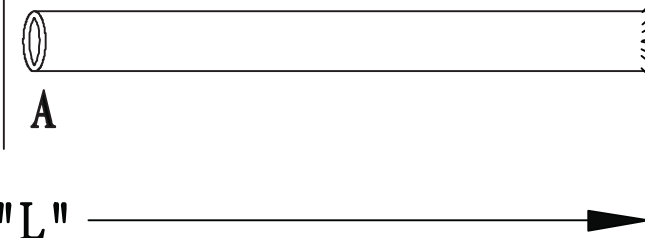


BROWN  
BLUE  
YELLOW  
GREEN  
RED  
BLACK  
ORANGE  
WHITE

BROWN  
BLUE  
YELLOW  
GREEN  
RED  
BLACK  
ORANGE  
WHITE

A  
A  
"L"

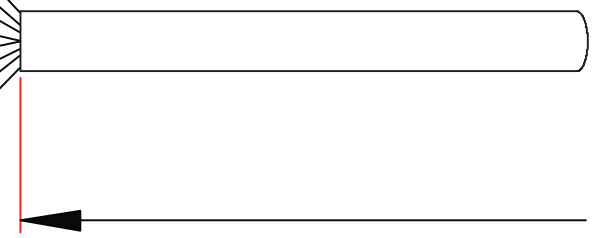


Conductor: [26AWG(0.16/7)Bare Copper]x8C




Insulation: [PP6331 ID:0.95±0.03]x8C

Jacket: PVC NOUL 65P

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-K-S-26-8-B/7-R	A	2,135±30(7ft)	Black	2,145-2,155mm
AT-K-S-26-8-B/14-R	B	4,270±60(14ft)	Black	4,290-4,300mm
AT-K-S-26-8-B/25-R	C	7,625±100(25ft)	Black	7,650-7,660mm

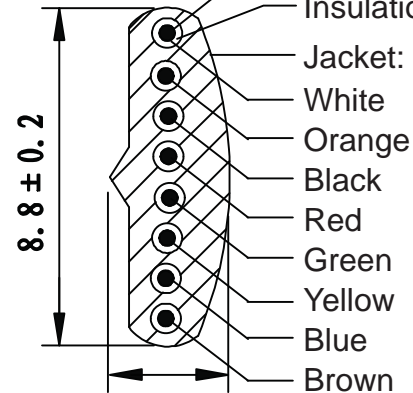

2.4 ± 0.2  
**SEC: A=A**

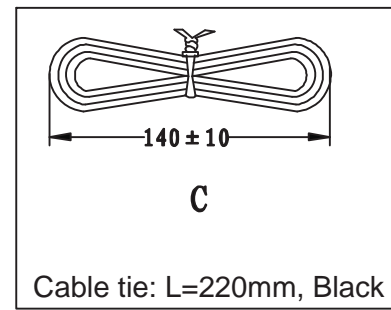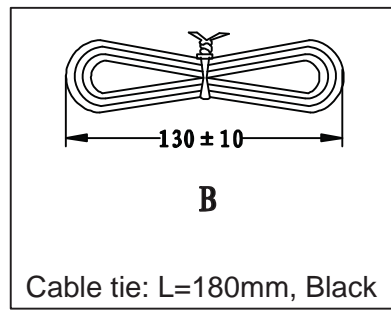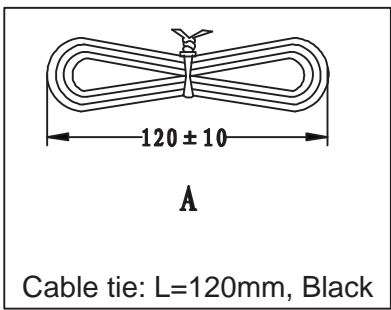

Unit: mm



Scale	Free				Date	Name	Title
TOLERANCE					Drawn	Wilson	Modular pre-cut cable - Straight 8C, 26AWG, Black, 7-25 feet
X.	±X				Approved	Groll	ASSMANN WSW-No. <b>AT-K-S-26-8-B/xx-R</b>
X.X	±X						Drawing-No.
X.XX	±X						rev00
DIM	TOL						Replace
X.°	±X°						Sheet
X.X°	±X°						1/1
Angle	TOL	Id.	Modification	Date	Name	<p>1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us</p>	



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@assmann.us