


A

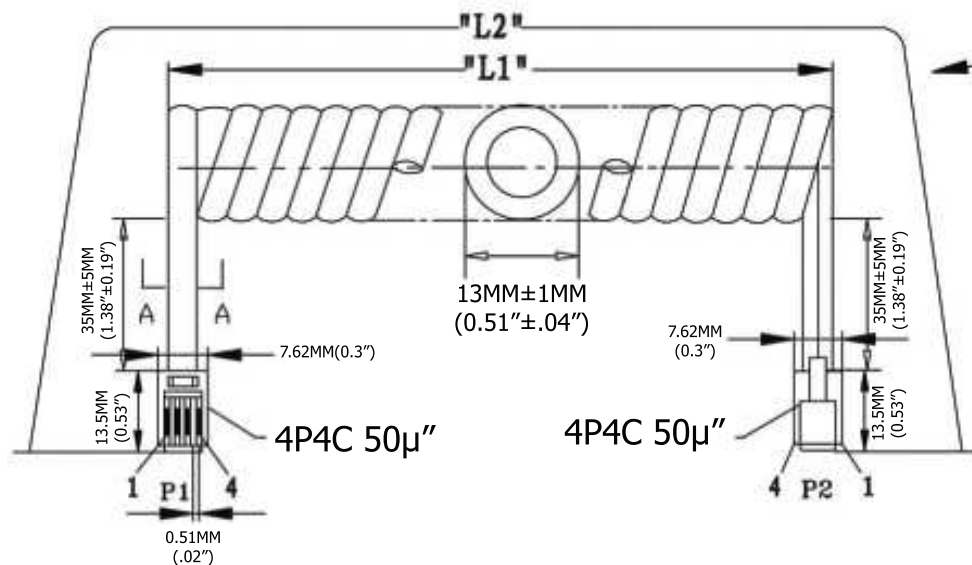

Extended length is with 500g of force

Diagram illustrating the cross-section of a 4-core cable. The overall diameter is $4.8\text{MM} \pm 0.2\text{MM}$ ($0.19'' \pm .008''$). The individual conductor diameter is $2.4\text{MM} \pm 0.2\text{MM}$ ($.09'' \pm .008''$). The layers are labeled: Conductor, Insulation, Jacket, Black, Red, Green, and Yellow.

SEC:A-A

TERMINATION:

P1	P2	COLOR
1	4	BLACK
2	3	RED
3	2	GREEN
4	1	YELLOW

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50μ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jack: PVC No UL 80 P
- Package: Individual PE Bag

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 345.0 Inches	75.0 Inches
7,620.0MM-8,763.0MM	1,905.0MM

RoHS Complaint

[illegible]

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AT-C-26-4/4/W-25-R

Title

NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*4.8MM,
Standard Plug, 50μ" of contact plating, WHITE

Drawing No.

rev00

Replace

Sheet