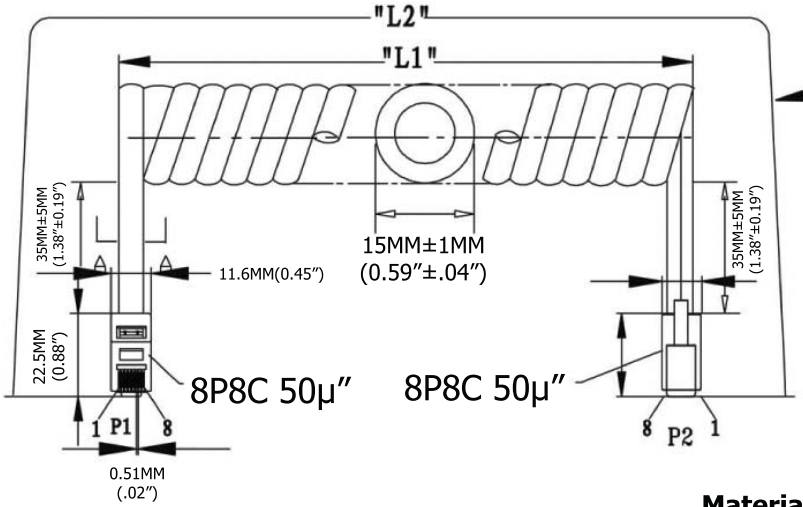

Extended length is with 500g of force

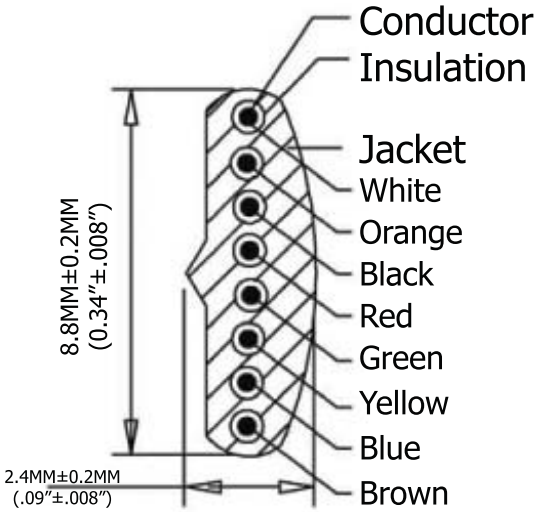

P1		P2
1	WHITE	8
2	ORANGE	7
3	BLACK	6
4	RED	5
5	GREEN	4
6	YELLOW	3
7	BLUE	2
8	BROWN	1

Extended Length ("L2")	Typical Retracted Length ("L1")
300.0 Inches - 28.75 Inches	126.0 Inches
7,620.0MM-8,763.0MM	3,200.4MM

Materials:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[.014MM] Thick Phosphor Bronze
- Connector: 50μ" of Selective Gold Contact Plating
  - Area, Gold flash over the remainde
  - Over 2.54μm[.000100] thick nickel underplate
- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

Unit: MM

SEC: A=A

Scale	1:1						Name
TOLERANCE							
X.X	±0.40			Drawn	11.18.11	Chappell	
X.XX	±0.25			Approved			
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

Item No. AT-C-26-8/8/S-25-R

Title NON-UL 26 AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Standard Plug, 50μ" of contact plating, Silver

Drawing No. **rev00**

Replace | Sheet

ASSMANN WSW components

RoHS Complaint