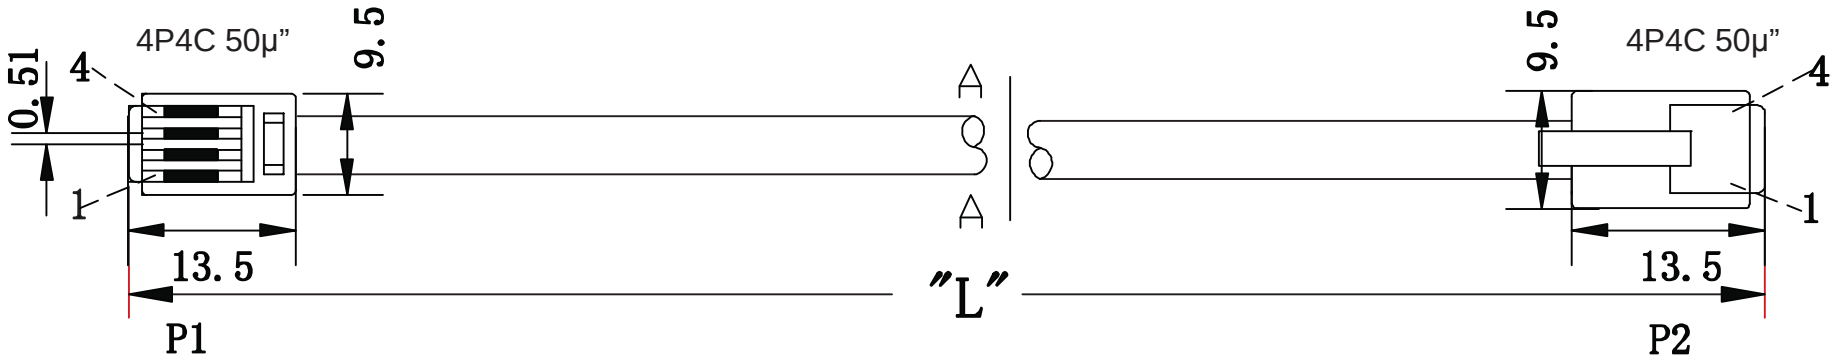

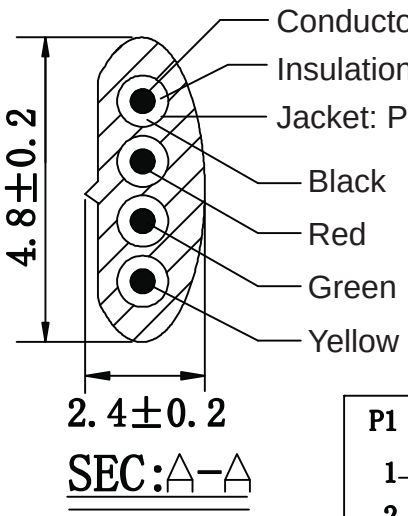

P1		P2
1	BLACK	1
2	RED	2
3	GREEN	3
4	YELLOW	4



A, B, C, D



E, F, G

Note:

- Material: Housing-polycarbonate, clear Terminal-0.36[.014] thick phosphor bronze. Thick gold in localized gold plate. Area, Gold Flash over the remainder. Over 2.54mm[.000100] thick nickel underplate.

Part Number	Drawing Number	Wire Length "L"	Jacket Color	Cut Length
AT-S-26-4/4/S-5/R-R	A	1,525±20(5ft)	Silver	1,525-1,535mm
AT-S-26-4/4/S-7/R-R	B	2,135±30(7ft)	Silver	2,135-2,145mm
AT-S-26-4/4/S-10/R-R	C	3,050±60(10ft)	Silver	3,050-3,060mm
AT-S-26-4/4/S-12/R-R	D	3,660±60(12ft)	Silver	3,660-3,670mm
AT-S-26-4/4/S-14/R-R	E	4,270±60(14ft)	Silver	4,270-4,280mm
AT-S-26-4/4/S-25/R-R	F	7,625±100(25ft)	Silver	7,625-7,635mm
AT-S-26-4/4/S-50/R-R	G	15,250±150(50ft)	Silver	15,250-15,260mm

Unit: mm

RoHS Compliant

Scale	Free
TOLERANCE	
X.	±X
X.X	±X
X.XX	±X
DIM	TOL
X.°	±X°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name

	Date	Name
Drawn	27.06.13	Wilson
Approved	27.06.13	Groll

ASSMANN WSW components
1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title
Modular cable - Straight/Reversed
4P4C 50μ", 26AWG, Silver, 5-50 feet

ASSMANN WSW-No.
AT-S-26-4/4/S-xx/R-R

Drawing-No.

rev00

Replace

Sheet 1/1