



A

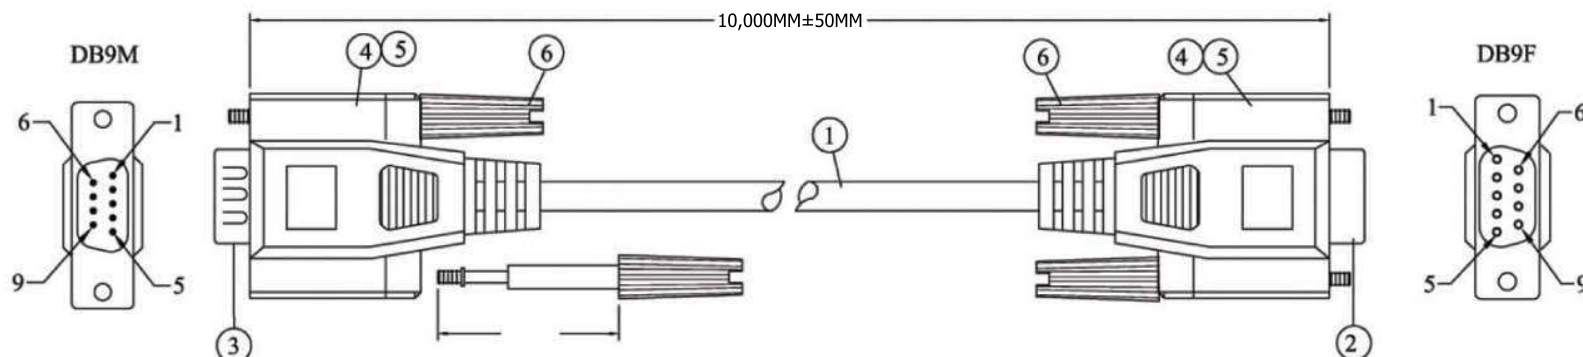

DB9M		DB9F
1	—————	1
2	—————	2
3	—————	3
4	—————	4
5	—————	5
6	—————	6
7	—————	7
8	—————	8
9	—————	9
SHIELD	—————	SHIELD

⑥	THUMB SCREW: #4-40UNC
⑤	OUTER MOLD: PVC 45P COLOR BEIGE
④	INNER MOLD: PVC 65P
③	CONNECTOR: DB9 MALE SOLDER TYPE INSULATION:BLUE
②	CONNECTOR: DB9 FEMALE SOLDER TYPE INSULATION:BLUE
①	CABLE: NOUL 28AWG*9C+AD O.D:5.0MM PVC JACKET COLOR BEIGE(CS-B02)
NO.	DESCRIPTION

ELECTRICAL TEST:

- 1.100% SHORT,OPEN,MISWIRE TEST
2.CONTACTOR RESISTANCE: 2 Ohm (MAX.)
3.INSULATION RESISTANCE: 5M Ohm(MIN.)

Scale	1:1							Name
TOLERANCE						Drawn	11.15.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	AK180-10-R		
Title	Extension Cable M-F 9 Pin, 10 Meters		
Drawing No.			rev00
Replace			Sheet



H