Material
Solid PIN: Brass(CuZn), Tin plated
Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus
Voltage rating: 300V
Current rating: 10A
Withstanding Voltage: 1.6KV
Operating temperature: -40°C to +115°C
Soldering temperature: 250°C±10°C/5 Sec
Safety Approval: c us

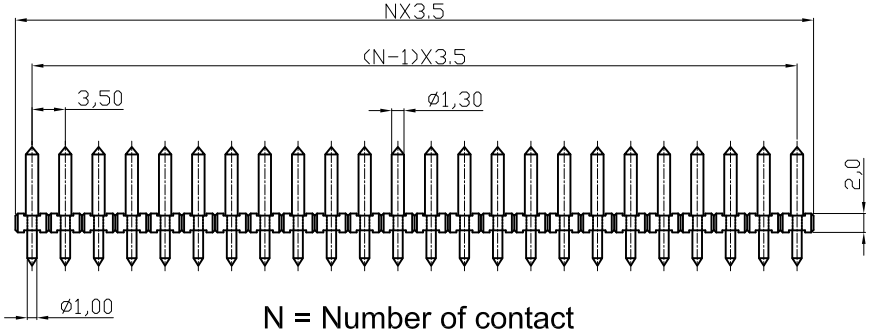


N = Number of contact




P.C.B. LAYOUT

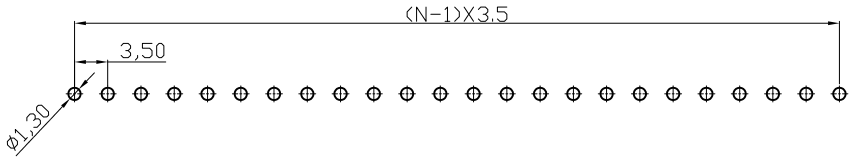


**RoHS compliant**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| Scale | 1:1 | | | | | | Date | Name | Customer-No. |
| TOLERANCE | | | | | | Drawn | 29.11.2006 | Hellwig | |
| X. | ±0.50 | | | | | Approved | 29.07.2009 | Hellwig | ASSMANN WSW-No. A-TB350-OPxx |
| X.X | ±0.30 | | | | | | | | |
| X.XX | ±0.10 | | | | | | | | |
| DIM | TOL | ② | Update | 29.07.2009 | Dean | | | | Drawing-No. ASS 1149 CO rev02 |
| X.° | ±1° | | | | | | | | |
| X.X° | ±X° | ① | Drawn | 29.11.2006 | Hellwig | | | | |
| Angle | TOL | Id. | Modification | Date | Name | | | | Replace / Sheet |

ASSMANN WSW components

SVxxxx