


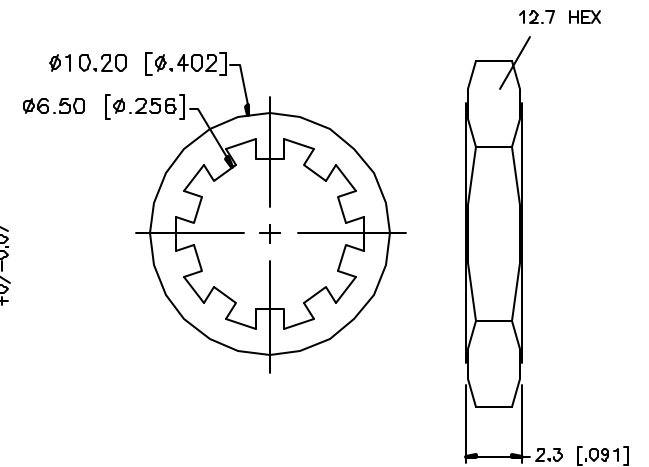


REV.	DATE	DESCRIPTION
NC	11/11/01	INITIAL RELEASE

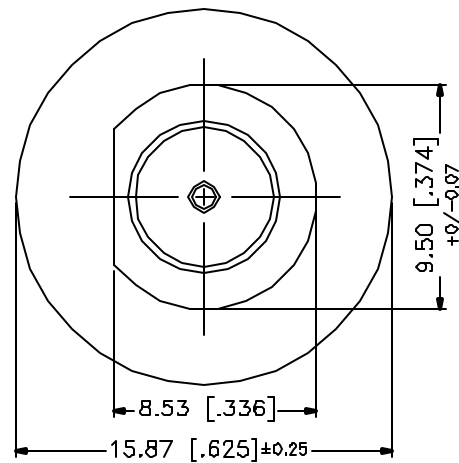

RECOMMENDED
MOUNTING HOLE

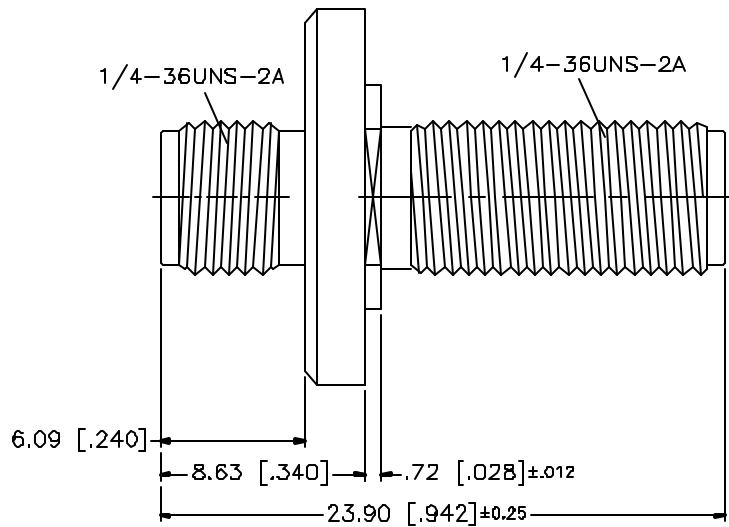

NOTES:

1. MAX. PANEL THICKNESS = 5mm

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE													
1	BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN	G.R.S.	11/11/01	TITLE SMA BULKHEAD FEMALE TO FEMALE ADAPTOR <table><tr><td>SIZE</td><td>FSCM NO.</td><td>DWG. NO.</td><td>REV.</td></tr><tr><td>A</td><td>99001</td><td>132170-11.DWG</td><td>NC</td></tr></table>				SIZE	FSCM NO.	DWG. NO.	REV.	A	99001	132170-11.DWG	NC
SIZE	FSCM NO.	DWG. NO.	REV.																
A	99001	132170-11.DWG	NC																
2	INSULATOR	TEFLON	NATURAL	CHECKED															
3	CONTACT PIN	BER. COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	ISSUED														
4	LOCK WASHER	BRASS	GOLD																
5	HEX NUT	BRASS	GOLD																
6																			
7																			
8				DO NOT SCALE DRAWING			SCALE	NA	PART NO.	132170-11	SHEET	1 OF 1							