

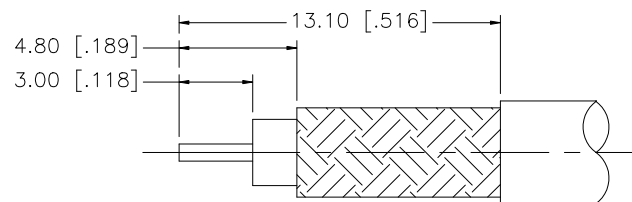
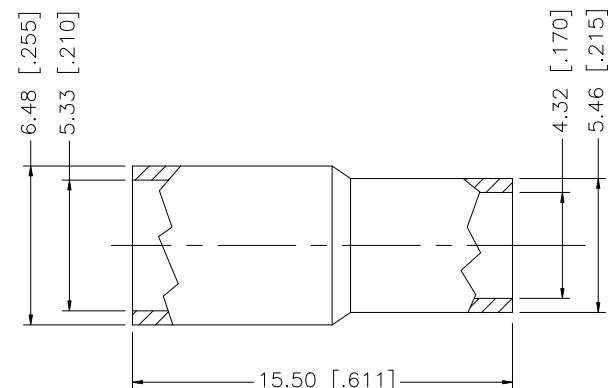


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/05/07	—	INITIAL RELEASE
A	06/07/07	—	REVISE BODY LENGTH AND DIAMETER, REVISE CONTACT PIN
B	01/28/08	—	ADD CABLE STRIPPING DIMENSIONS
C	05/25/08	100019	REVISE BODY AND CONTACT PIN DESIGN
D	07/21/08	—	ADD MID BODY DIA. DIMENSION 7.78 [.307]

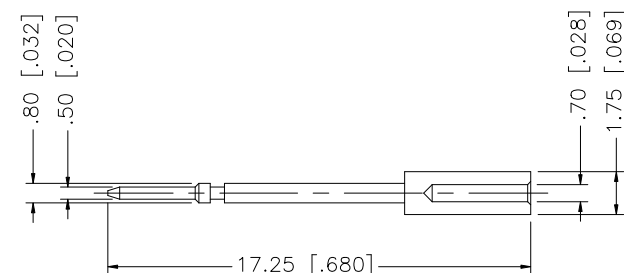

RECOMMENDED CABLE
STRIPPING DIMENSIONS

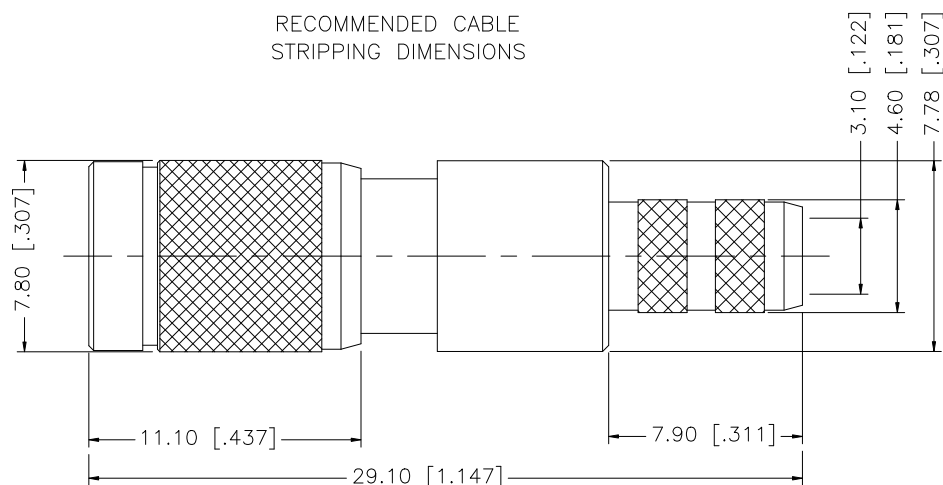

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex										
8						DRAWN	G.R.S.	07/21/08												
7						CHECKED														
6						ISSUED														
5						SHEET		1 OF 1		PART DESCRIPTION 1.0/2.3 PUSH–PULL CRIMP PLUG (FOR BELDEN 1855A CABLE)										
4	FERRULE	COPPER	GOLD	1																
3	CONTACT PIN	BRASS	GOLD	1							PART NO. 282122–75									
2	INSULATOR	PTFE	NATURAL	1																
1	BODY	BRASS	NICKEL	1							DWG. NO.		282122–75.DWG		REV.	D	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY							CAD FILE		C:/282/282122–75.DWG							