

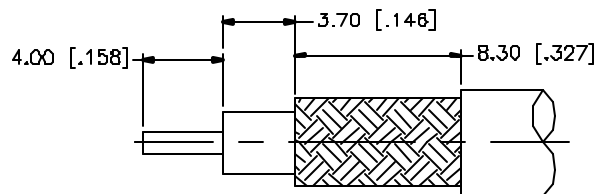
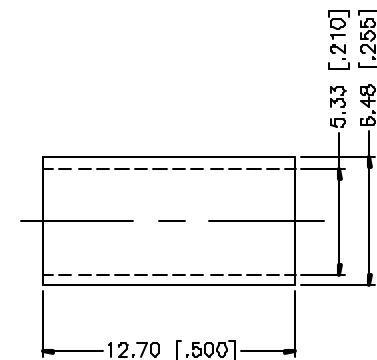


REV.	DATE	DESCRIPTION
NC	05/01/04	INITIAL RELEASE

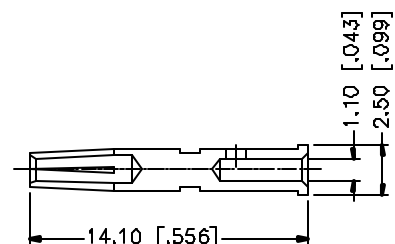

RECOMMENDED
CABLE STRIPPING DIM'S

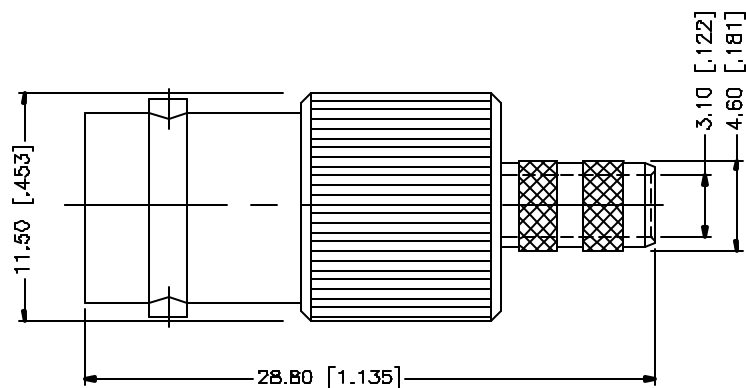

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.	05/01/04	PART DESCRIPTION BNC CRIMP JACK				
7						CHECKED							
6						ISSUED							
5						SHEET	1 OF 1		PART NO. 112148				
4	FERRULE	COPPER	NICKEL	1									
3	CONTACT PIN	PHOS. BRONZE	GOLD	1				DWG. NO. 112148.DWG REV. NC SIZE A SCALE NA					
2	INSULATOR	DELRI	NATURAL	1									
1	HOUSING/BODY	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/112/112148.DWG							