

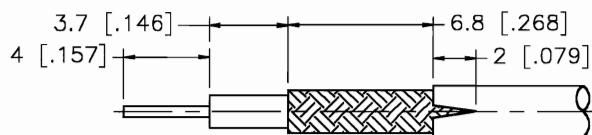
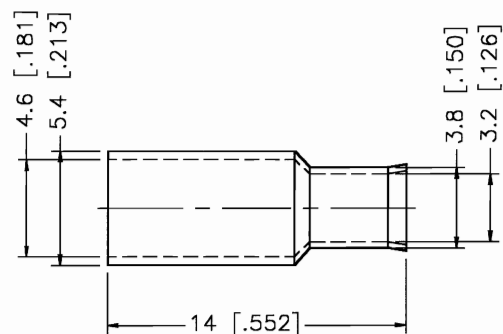
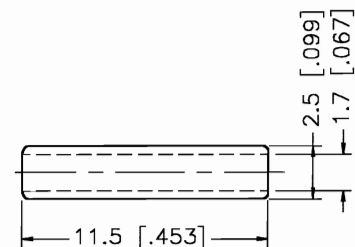


REV.	DATE	DESCRIPTION
A	10/28/99	MODIFY FERRULE PLATING

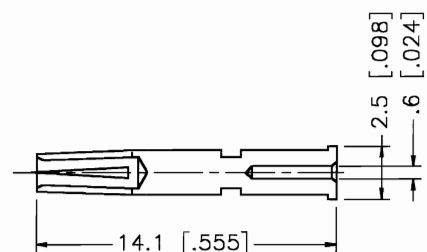

RECOMMENDED
CABLE STRIPPING DIM'S

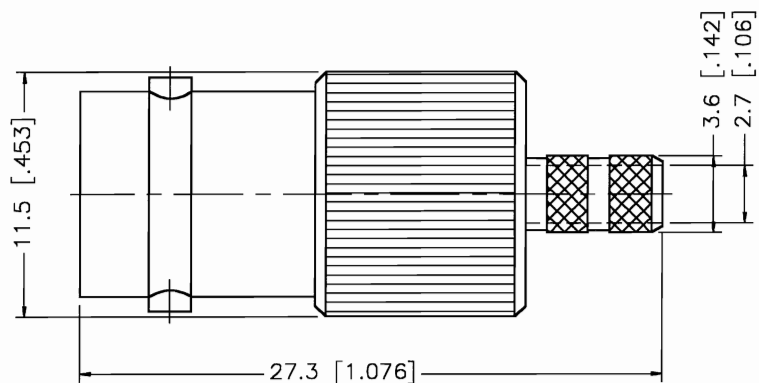

	DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE						
1	BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN	G.R.S.	10/25/99	TITLE BNC STRAIGHT CRIMP JACK (FOR RG-316/U DOUBLE BRAID CABLE)				
2	INSULATOR	DELRIN	NATURAL		CHECKED							
3	CONTACT PIN	PHOS. BRONZE	GOLD		ISSUED							
4	SLEEVE	DELRIN	NATURAL					SIZE	FSCM NO.	DWG. NO.	REV.	
5	FERRULE	BRASS	NICKEL					A	99001	112529.DWG	A	
6												
7												
8				DO NOT SCALE DRAWING			SCALE	NA	PART NO.	112529	SHEET	1 OF 1