

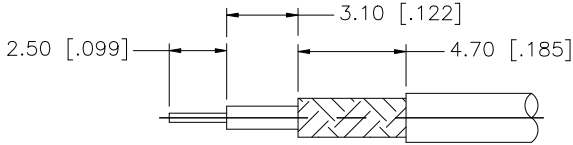



REV.	DATE	DESCRIPTION
NC	06/02/99	INITIAL RELEASE
A	10/03/07	UPDATE DRAWING FORMAT



RECOMMENDED CABLE
STRIPPING DIM'S

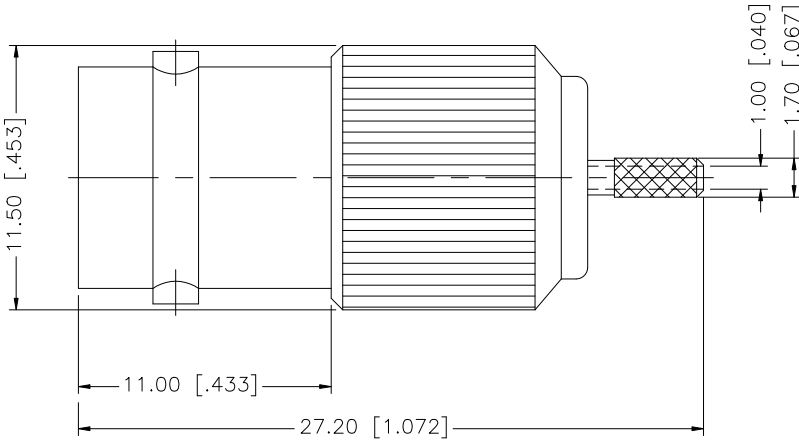

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"
 2. CRIMPED CONTACT PIN - 4-WAY CRIMP OR SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex									
8						DRAWN	G.R.S.	10/03/07	PART DESCRIPTION BNC CRIMP JACK (FOR RG-178/U, 196A/U CABLE)								
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED											
6						ISSUED											
5					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1										
4	FERRULE	COPPER	NICKEL	1		CAD FILE			PART NO. 112631								
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		C:/112/112631.DWG											
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO.		112631.DWG	REV.	A	SIZE	A	SCALE	NA
1	BODY	BRASS	NICKEL	1													
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING												