

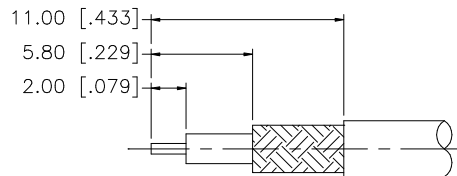

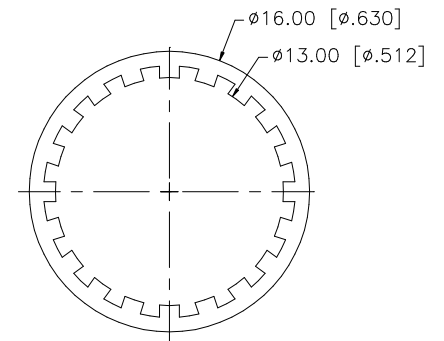




REV.	DATE	DESCRIPTION
A	05/01/04	UPDATE DRAWING FORMAT
B	10/19/05	MODIFY FERRULE DIMENSION



RECOMMENDED CABLE
STRIPPING DIMENSIONS

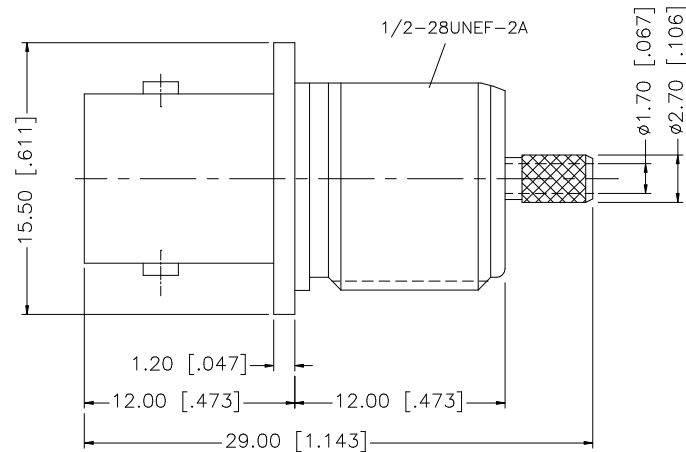

RECOMMENDED
MOUNTING HOLE

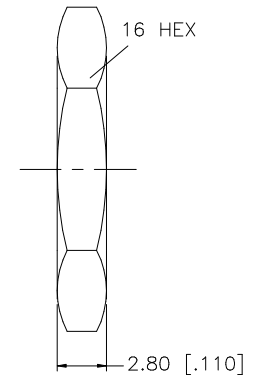

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm
3. MAX. PANEL THICKNESS = 7mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
8						DRAWN	G.R.S.							05/01/04
7						CHECKED			PART DESCRIPTION BNC BULKHEAD CRIMP JACK – FRONT MOUNT (FOR RG-316U/D CABLE)					
6						ISSUED								
5						SHEET	1 OF 1		PART NO. 112635					
4	FERRULE	COPPER	NICKEL	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		CAD FILE C:/112/112635.DWG			DWG. NO. 112635.DWG					
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	NICKEL	1				REV. B	SIZE A	SCALE NA				
	DESCRIPTION	MATERIAL	FINISH	QTY										