
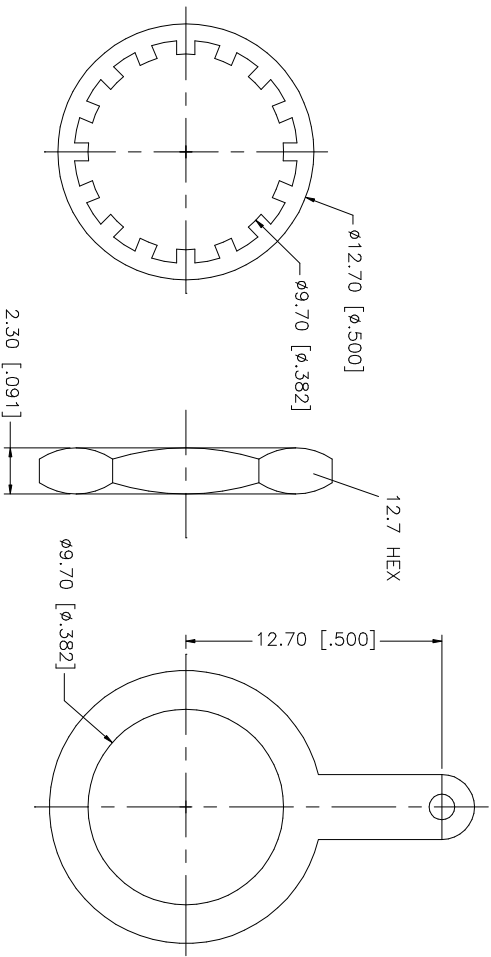
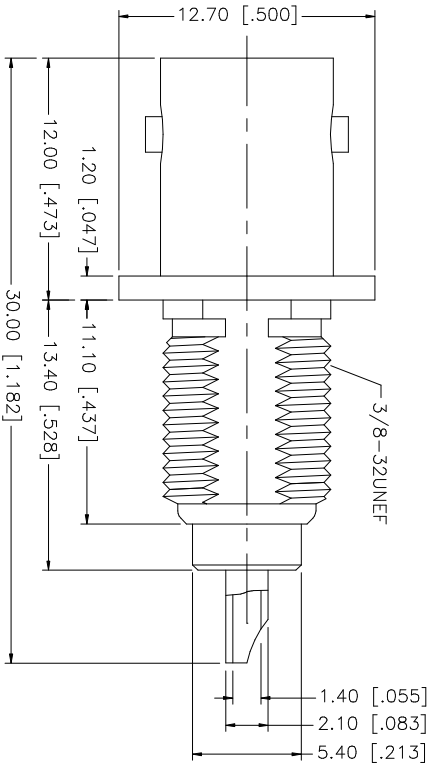


REV.	DATE	DESCRIPTION
NC	04/05/03	INITIAL RELEASE



8				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex BNC BULKHEAD RECEPTACLE – 50 ohms
7				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	
6	SOLDER TAB	BRASS	NICKEL	0.5 – 8mm ± 0.20mm	CHECKED		
5	HEX NUT	BRASS	NICKEL	8 – 30mm ± 0.40mm	ISSUED		
4	LOCK WASHER	BRASS	NICKEL	30 – 120mm ± 0.50mm			
3	INSULATOR	DELTRIN	NATURAL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:			PART NO.
2	CONTACT PIN	PHOS. BRONZE	GOLD	.020 – .315 = ± 0.007"	SHEET	1 OF 1	112426
1	BODY	BRASS	NICKEL	.315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.
						C:/112/112426.DWG	112426.DWG
							REV. NC
							SIZE A
							SCALE NA