

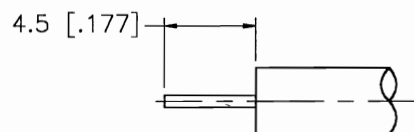



REV.	DATE	DESCRIPTION
A	11/28/99	UPDATE DESCRIPTION

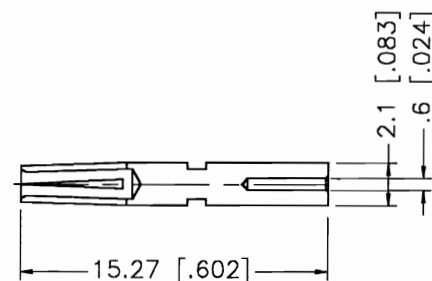

RECOMMENDED
CABLE STRIPPING DIM'S

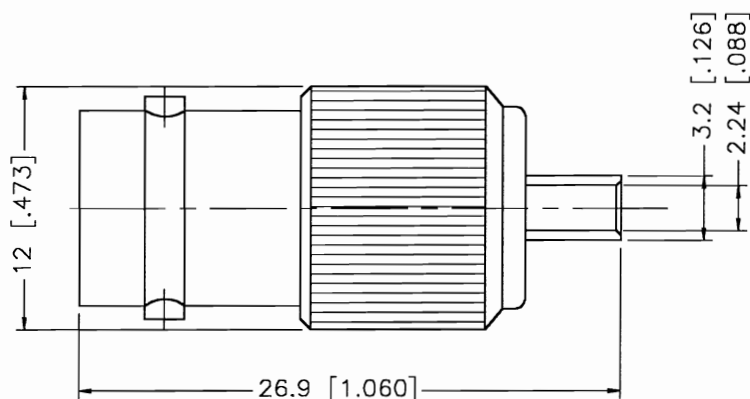

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	 Connex Connector Corporation			
1 BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN G.R.S.	11/28/99				
2 BARREL	BRASS	GOLD		CHECKED		TITLE BNC CRIMP JACK (FOR .085 SEMI RIGID CABLE)			
3 INSULATOR	TEFLON	NATURAL		ISSUED					
4 CONTACT PIN	PHOS. BRONZE	GOLD				SIZE A	FSCM NO. 99001	DWG. NO. 112615.DWG	REV. A
5						SCALE NA	PART NO. 112615	SHEET 1 OF 1	
6									
7									
8			DO NOT SCALE DRAWING						