

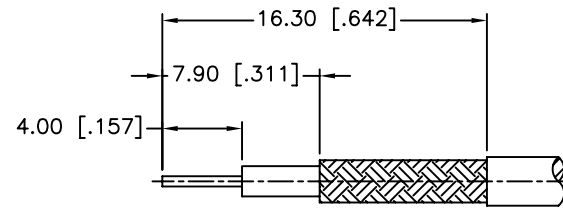
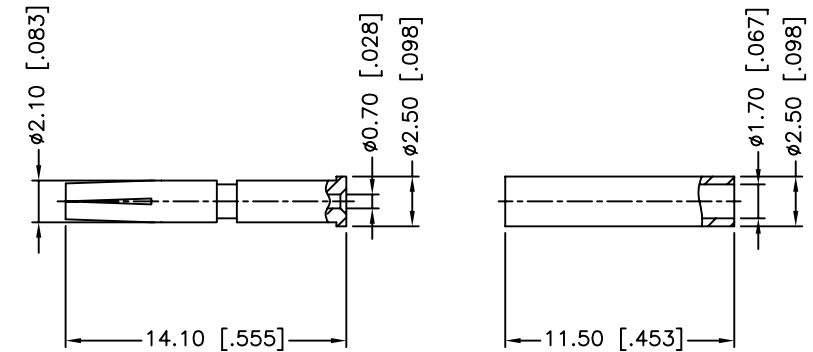


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/21/11	XXXXXX	INITIAL RELEASE

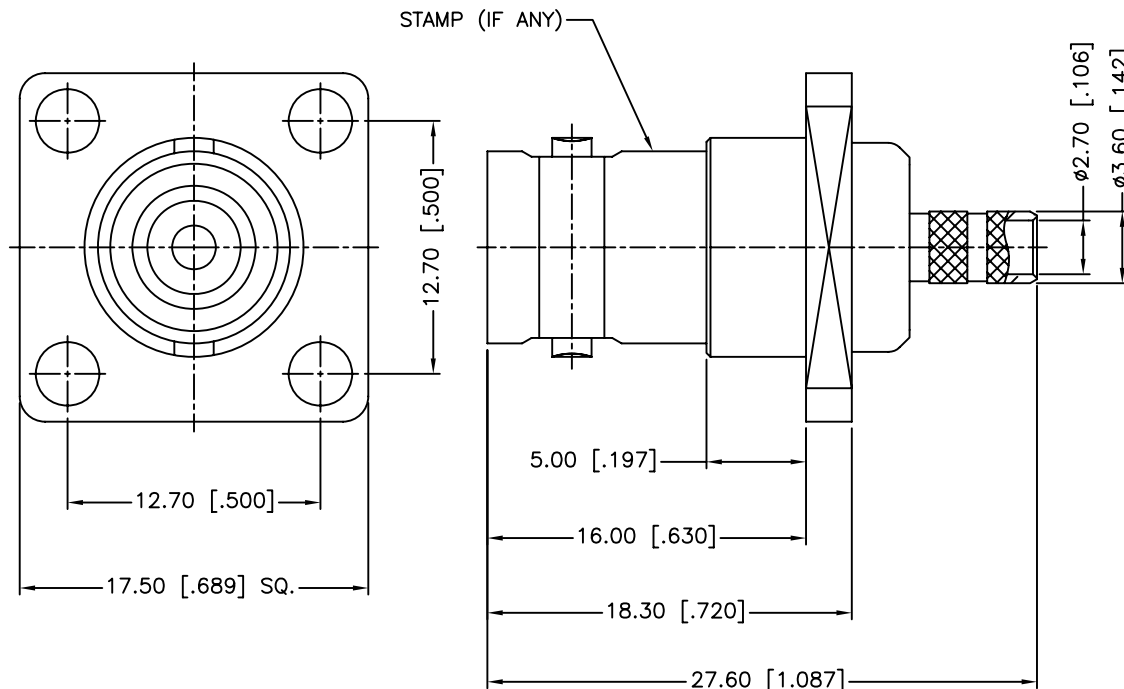

RECOMMENDED
CABLE STRIPPING DIM'S

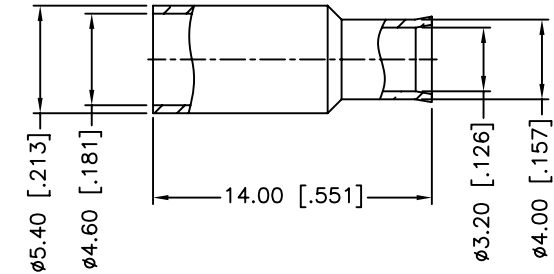

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-1 GHz
3. VSWR(RETURN LOSS): 1.5, MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
5. DURABILITY: 500 CYCLES MIN.
6. TEMPERATURE RANGE: - 40°C to +155°C
7. CRIMPED FERRULE HEX CRIMP SIZE .187"
8. CRIMPED CONTACT PIN HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex			
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN M.ZHANG		12/21/11					
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		CHECKED							
5	FERRULE	BRASS	NICKEL	1			ISSUED				PART DESCRIPTION BNC PANEL CRIMP JACK (FOR RG–174/U,188A/U,316/U,316U/D CABLE)			
4	SLEEVE	DELRI	NICKEL	1			SHEET 1 OF 1							
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1							PART NO. 112530			
2	INSULATOR	PTFE	NATURAL	1										
1	BODY	BRASS	NICKEL	1							DWG. NO. 112530.DWG REV. NC SIZE A SCALE NA			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE C:/CONNEX/112530.DWG							

5	FERRULE	BRASS	NICKEL	1
4	SLEEVE	DELIN	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING