

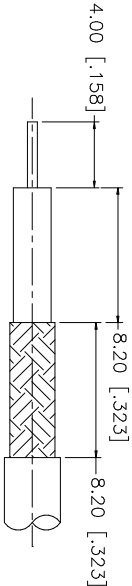
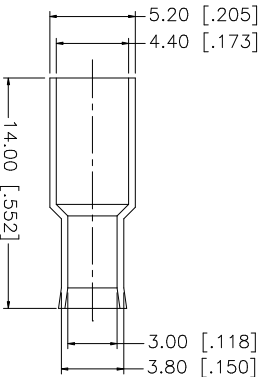




REV.	DATE	DESCRIPTION
NC	12/27/03	INITIAL RELEASE

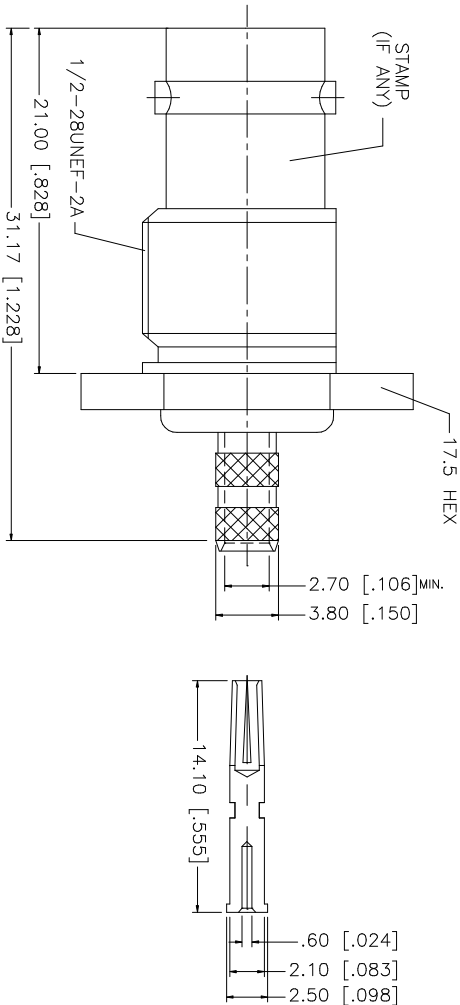

RECOMMENDED CABLE STRIPPING DIMENSIONS

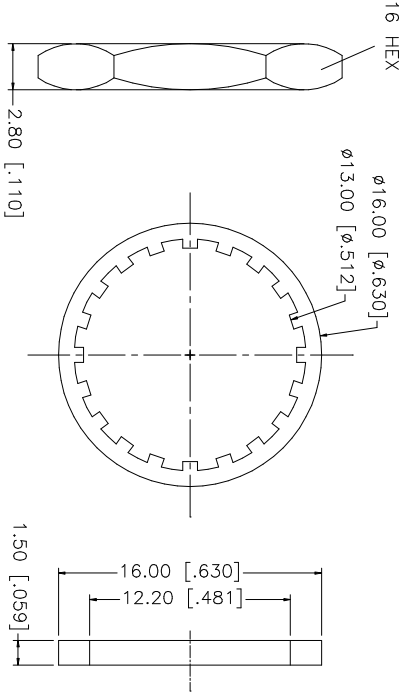

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"
 3. MAX. PANEL THICKNESS = 6.5mm

8	HEX NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		
7	LOCK WASHER	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		
6	FERRULE	BRASS	NICKEL	1	0.5 - 8mm ± 0.20mm		
5	SLEEVE	DELRI [®]	NATURAL	1	8 - 30mm ± 0.40mm		
4	GASKET	RUBBER	RED	1	30 - 120mm ± 0.50mm		
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:		
2	INSULATOR	TEFLON	NATURAL	1	.020 - .315 = ± 0.007"		
1	BODY	BRASS	NICKEL	1	.315 - 1.180 = ± 0.015"		
DESCRIPTION					1.180 - 4.724 = ± 0.020"		
MATERIAL					DO NOT SCALE DRAWING		
FINISH					CAD FILE		
QTY					C:/112/112719.DWG		
APPROVALS					DATE		
DRAWN					G.R.S.		
CHECKED					12/27/03		
ISSUED							
SHEET					1 OF 1		
PART NO.							
DWG. NO.					112719.DWG		
REV. NC					SIZE A		
SCALE					NA		

Amphenol Connex

BNC BULKHEAD CRIMP JACK
(FOR RG-174/U, 188A/U, 316/U CABLE)

112719