


REV.	DATE	DESCRIPTION
NC	04/16/98	INITIAL RELEASE
A	11/03/03	UPDATE DRAWING FORMAT

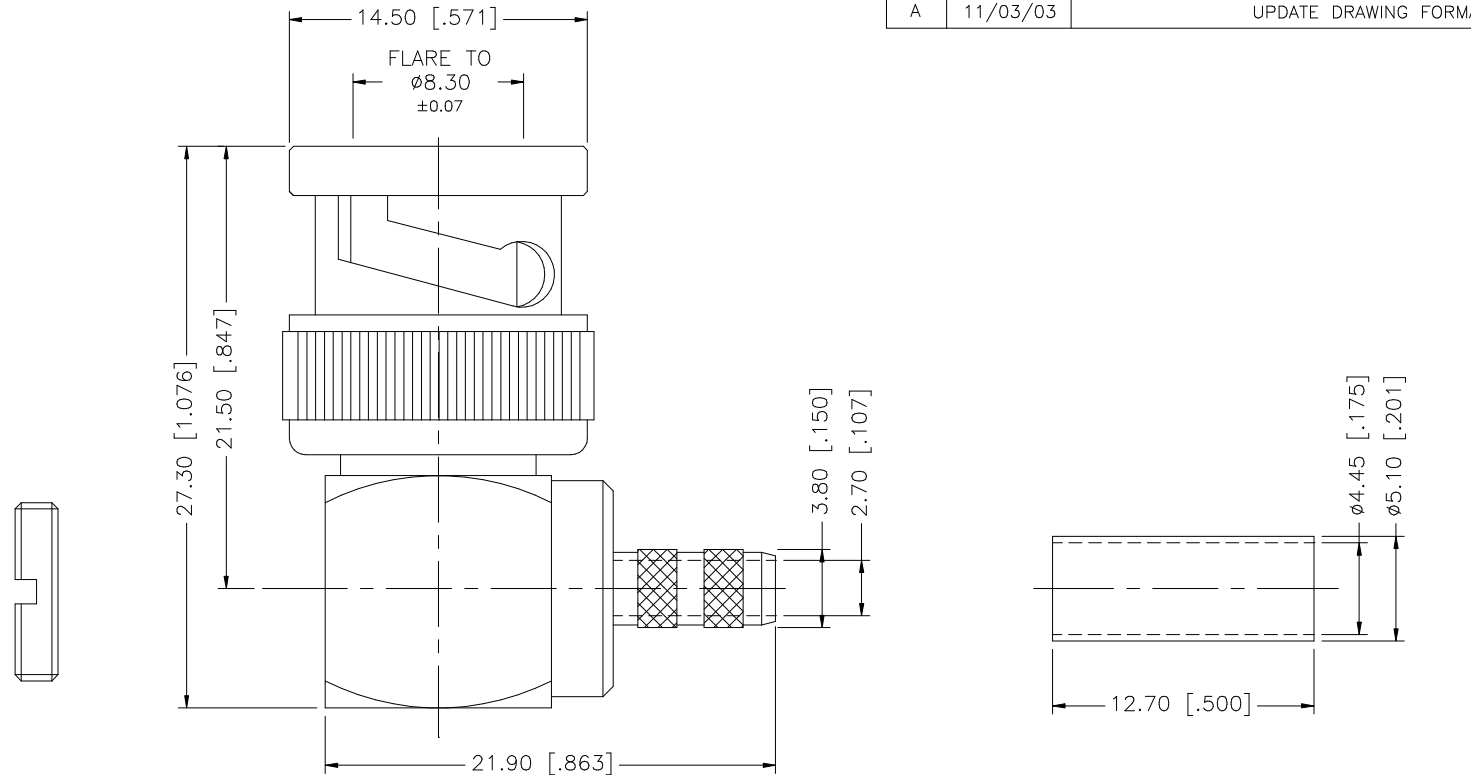

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
2. CONTACT PIN TO SOLDER

RECOMMENDED
CABLE STRIPPING DIM'S

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.					APPROVALS		DATE	Amphenol Connex			
8					DRAWN	G.R.S.	11/03/03				
7					CHECKED						
6					ISSUED						
5	NUT	BRASS	NICKEL	1	SHEET	1 OF 1					
4	FERRULE	COPPER	NICKEL	1	CAD FILE			C:/112/112588.DWG			
3	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:			PART DESCRIPTION			
2	INSULATOR	TEFLON	NATURAL	1	0.5 - 8mm ± 0.20mm			BNC R/A CRIMP PLUG (FOR BELDEN 8218)			
1	BODY	BRASS	NICKEL	1	8 - 30mm ± 0.40mm			RG-180/U, 195/U, 122/U CABLE - 75ohm			
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:			PART NO.			
					.020 - .315 = ± 0.007"			112588			
					.315 - 1.180 = ± 0.015"			DWG. NO. 112588.DWG			
					1.180 - 4.724 = ± 0.020"			REV. A			
DO NOT SCALE DRAWING								SIZE A			
DESCRIPTION								SCALE NA			
MATERIAL											
FINISH											
QTY											