
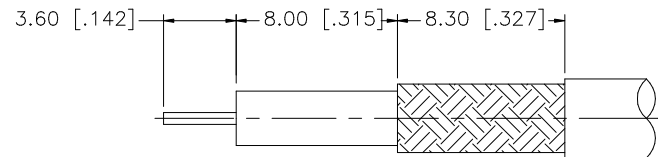
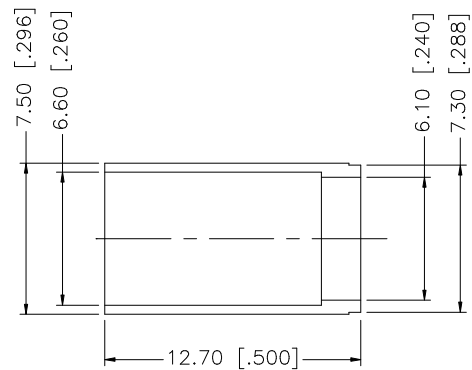



REV.	DATE	DESCRIPTION
NC	06/11/00	INITIAL RELEASE
A	08/17/06	UPDATE DRAWING FORMAT

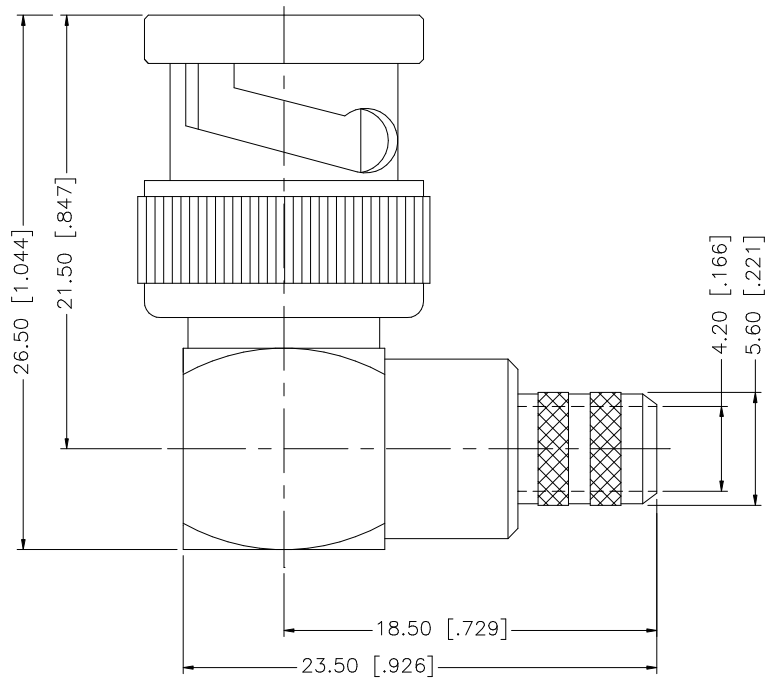

RECOMMENDED
CABLE STRIPPING DIM'S

CRIMP NOTES:

1. CRIMPRED FERRULE HEX CRIMP SIZE .255"
2. CENTER CONTACT TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS		DATE		Amphenol Connex										
7						DRAWN	G.R.S.	08/17/06												
6						CHECKED														
5	FERRULE	COPPER	NICKEL	1			ISSUED				PART DESCRIPTION BNC R/A CRIMP PLUG (AT&T 734A CABLE)									
4	COVER	BRASS	NICKEL	1			SHEET	1 OF 1												
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE		C:/112/112961.DWG		PART NO. 112961										
2	INSULATOR	TEFLON	NATURAL	1																
1	BODY	BRASS	NICKEL	1						DWG. NO.		112961.DWG		REV.	A	SIZE	A	SCALE	NA	
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING															